MAINE STATE LEGISLATURE

The following document is provided by the

LAW AND LEGISLATIVE DIGITAL LIBRARY

at the Maine State Law and Legislative Reference Library

http://legislature.maine.gov/lawlib



Reproduced from scanned originals with text recognition applied (searchable text may contain some errors and/or omissions)

ANNUAL REPORT ON AIR QUALITY 1994



MAINE

DEPARTMENT OF ENVIRONMENTAL PROTECTION



TD 883.5 .M2

M33 1994

1994 ANNUAL REPORT ON AIR QUALITY IN THE STATE OF MAINE

Prepared by
Jeffrey C. Emery
with assistance from staff of the
Division of Technical Services
and the
Division of Field Services

Maine Department of Environmental Protection Bureau of Air Quality Control Division of Field Services

> Leighton E. Carver, Division Director Jim Brooks, Acting Bureau Director Edward O. Sullivan, Commissioner

TABLE OF CONTENTS

TABLE OF CONTENTS	
LIST OF TABLES	
LIST OF FIGURES	iv
1. INTRODUCTION	1
1.1 Purpose and Overview	1
1.2 Description of Air Monitoring Network	11
1.3 Document Organization	15
1.3.1 Explanation of Data Summary Tables	15
1.3.2 Explanation of Historical Comparison Tables	15
1.3.3 Explanation of Trends Tables	22
2. CARBON MONOXIDE (CO)	23
2.1 Description and Sources	23
2.2 Health and Welfare Effects	23
2.3 Standards	24
2.4 Monitoring	24
3. OZONE (O3)	25
3.1 Description and Sources	25
3.2 Health and Welfare Effects	25
3.3 Standards	26
3.4 Monitoring	.,26
4. NITROGEN DIOXIDE (NO2)	40
4.1 Description and Sources	40
4.2 Health and Welfare Effects	40
4.3 Standards	40
4.4 Monitoring	
5. SULFUR DIOXIDE (SO2)	42
5.1 Description and Sources	42
5.2 Health and Welfare Effects	42
5.3 Standards	42
5.4 Monitoring	42
6. PARTICULATES (TSP and PM10)	47
6.1 Description and Sources	47
6.2 Health and Welfare Effects	.47
6.3 Standards	
6.4 Monitoring	.48
7. LEAD (Pb)	58
7.1 Description and Sources	
7.2 Health and Welfare Effects	.58
7.3 Standards	.58
7.4 Monitoring	
8. SULFATES (SO4) AND NITRATES (NO3)	.59
8.1 Description and Sources	
8.2 Health and Welfare Effects	
8.3 Standards	.59
8.4 Monitoring	. 59

9. <i>A</i>	ATMOSP:	HERIC DEPOSITION	62
	9.1	Description and Sources	62
	9.2	Health and Welfare Effects	62
	9.3	Standards	62
	9.4	Monitoring	62
10.	HYDRO	CARBONS (HC)	65
	10.1	Description and Sources	65
		Health and Welfare Effects	
	10.3	Standards	65
	10.4	Monitoring	65
11.	PRECISI	ON AND ACCURACY	66
	11.1	Precision	66
	11.2	Accuracy	66
12.	AIR TOX	acs	75
	12.1	Compound-specific Background	75
	12.2	Monitoring	77
		References	
13. I	HYDROC	CARBONS AS PRECURSORS TO GROUND LEVEL OZONE FORMATIO	N81
	13.1	History and Establishment of Site	81
	13.2	Monitoring	81
		Chemistry	
	13.4	Relationship with Ozone (O3) and Nitrogen Oxides (NOx)	81
14.	ULTRAV	/IOLET-B(UV-b)	87
	14.1	Description and Sources	87
	14.2	Health and Welfare Effects	87
	14.3	Standards	87
	14.4	Monitoring	87
15.	ERRATA	A SHEETS	90

LIST OF TABLES

Table	TIPLE	PAGE
1-1	National Ambient Air Quality Standards	2
1-2	State of Maine Ambient Air Quality Standards	2
1-3	Number of Ambient Air Quality Violations by Regions	3
1-4	Distribution of Air Monitoring Instruments	14
1-5	Monitor Operators During 1994	14
1-6	1994 Ambient Air Quality Monitoring Site Directory	16
3-1	1994 Ozone Data Summary	28
3-2	Ozone Historical Comparisons	29
3-3	Ozone Trends	30
3-4	Summary of Hourly Ozone Data For Sites Operating During 1994	31
3-5	Federal Ozone Exceedances in Maine Listed by County and Site	35
3-6	Yearly State Ozone Standard Exceedance Days Comparison	39
3-7	Yearly Federal Ozone Standard Exceedance Days Comparison	39
4-1	1994 Nitrogen Dioxide Data Summary	41
5-1	1994 Sulfur Dioxide Data Summary	43
5-2	Sulfur Dioxide Historical Comparisons-Maximum 24-Hour	44
	Concentrations of Sulfur Dioxide	
5-3	Sulfur Dioxide Historical Comparisons-Sites with Exceedances of	45
	the Standards in the Past Seven Years	40
6-1	1994 Total Suspended Particulates Data Summary	49 7 0
6-2	Total Suspended Particulates Historical Comparison-Annual	5 0
()	Geometric Means Tatal Surgery and all Posting Lates Historical Comparisons Sites With	51
6-3	Total Suspended Particulates Historical Comparisons-Sites With Samples Greater Than 150 ug/m ³	31
6-4	1994 Fine Particulate Data Summary	52
6-5	Fine Particulates Historical Comparison-Annual Arithmetic Means	5 4
6-6	Fine Particulates Historical Comparison-Sites with Samples	5 6
0-0	Greater Than 150 ug/m ³	30
8-1	Sulfate Thresholds for Adverse Health Effects	60
8-2	1994 Sulfate Data Summary	61
9-1	1994 Atmospheric Deposition Data Summary	63
9-2	Historical Summary of Atmospheric Deposition Data	64
11-1	1994 Precision Data Summary	68
11-2	1994 Accuracy Data Summary	72
13-1	Target VOC Ozone Precursors - Hydrocarbons	83
14-1	Highest Values For Total Solar, UV-b And Med Units(1994)	88

LIST OF FIGURES

Figure	TITLE	PAGE
1-1	Total Suspended Particulate Trends	4
1-2A	PM10 Trends - Southern Maine	5
1-2B	PM10 Trends - Northern Maine	6
1-3A	Southern Maine Sulfur Dioxide Trends - 24 Hour	7
1-3 B	Northern Maine Sulfur Dioxide Trends - 24 Hour	8
1-4A	Southern Maine Sulfur Dioxide Trends - AAM	9
1-4B	Northern Maine Sulfur Dioxide Trends - AAM	10
1-5	Ozone Trends - Hours of State Violations	12
1-6	Map of the State of Maine	21
13-1	Chromatogram of Calibration Compounds	84
13-2	Cape Elizabeth - Two Lights State Park July 9, 1994	85
13-3	Cape Elizabeth - Two Lights State Park July 21, 1994	86

1. INTRODUCTION

1.1 Purpose and Overview

The purpose of this report is to present the air quality monitoring data generated by and for the Maine Department of Environmental Protection, Bureau of Air Quality Control, and to provide a historical perspective from which the significance of that data can be interpreted. Air Quality monitoring measures the concentrations of various pollutants in the ambient air. The monitoring is in response to State and Federal requirements to determine whether the air we breathe is attaining and maintaining National and State Ambient Air Quality Standards which are designed to protect the health and welfare of the public. Federal Primary Standards are intended to protect public health. Federal Secondary Standards are intended to protect public welfare. The State Standards are at least as strict as Federal Standards and in some cases are more strict. The reasoning behind establishing more stringent standards is that generally air quality in Maine is significantly cleaner than in other areas and should remain cleaner. The current Federal and State Standards are presented in Tables 1-1 and 1-2. Table 1-3 is a summary indicating all the violations of ambient air quality standards in the State by regions. Later on in this report those violations will be listed by the sites at which they occurred.

A significant portion of the data collected in the State is collected by industry. The DEP has required industry to establish monitoring programs primarily when there are air quality problems associated with the industry, or when an industry is planning to build or expand causing a potential increase in air emissions. The State is still collecting monitoring data for long term trends, special studies and for compliance determinations. Ambient air monitoring by both industry and the State will continue in various regions where necessary until such time as standards are being met and background information has been collected.

Included in this section are some figures which depict some of the results of air quality monitoring and control in the State. Figures 1-1 through 1-5 display trends or the lack of a trend which have been occurring at several long term key sites around the State.

Figure 1-1 depicts the annual geometric means for total suspended particulates at two long term sites. The number of sites monitoring for total suspended particulates has significantly decreased since the standard was eliminated and will continue to do so. These sites have remained stable over the last five years.

Figures 1-2A and 1-2B indicate trends over the last ten years in the annual arithmetic means for fine particulate. The majority of the sites collecting PM10 data are showing either a downward trend or are low enough that they are probably recording regional background concentrations and are not indicating a significant trend in either direction.

Figures 1-3A, 1-3B, 1-4A and 1-4B indicate the sulfur dioxide trends at seven sites with a long term history. All of the sites appear to indicate relatively stable long term sulfur dioxide levels since

TABLE 1-1 NATIONAL AMBIENT AIR QUALITY STANDARDS (1994)

POLLUTANT	AVERAGING TIME	CONCENTRATION
Particulates (PM10)	Expected Annual Arithmetic Mean:	
, ,	Primary	50 ug/m ³
	Secondary	$50 \mathrm{ug/m^3}$
	Twenty-Four Hour:***	
	Primary	150 ug/m ³
	Secondary	150 ug/m ³
Lead (Pb)	Calendar Quarter	1.5 ug/m ³
Carbon Monoxide (CO)	One Hour**	35 ppm
	Eight Hour**	9 ppm
Ozone (O3)	One Hour***	0.12 ppm
Nitrogen Dioxide (NO2)	Annual Arithmetic Mean	0.05 ppm
Sulfur Dioxide (SO2)	Annual Arithmetic Mean	0.03 ppm
, ,	Twenty-Four Hour**	0.14 ppm
	Three-Hour Secondary**	0.50 ppm

^{* =} Federal Guideline Only.

TABLE 1-2 STATE OF MAINE AMBIENT AIR QUALITY STANDARDS (1994)

POLLUTANT	AVERAGING TIME	Concentration
Particulates (PM10) (Effective 9-30-89)	Annual Arithmetic Mean Twenty-Four Hour**	40 ug/m ³ 150 ug/m ³
Lead (Pb)	Twenty-Four Hour*	1.5 ug/m ³
Carbon Monoxide (CO)	One Hour*	35 ppm (40 mg/m ³)
	Eight Hour*	9 ppm (10 mg/m ³)
Ozone (O3)	One Hour*	.081 ppm (160 ug/m ³)
Nitrogen Dioxide (NO2)	Annual Arithmetic Mean	.053 ppm (100 ug/m ³)
Sulfur Dioxide (SO2)	Annual Arithmetic Mean	.022 ppm (57 ug/m ³)
	Twenty-Four Hour*	.088 ppm (230 ug/m ³)
	Three Hour*	.439 ppm (1150 ug/m ³)
Hydrocarbon	Three Hour*	160 ug/m ³
Particulates (TSP)***	Twenty-Four Hour	150 ug/m ³

^{* =} Not to be exceeded more than once per year.

^{** =} Not to be exceeded more than once per year.

^{*** =} Statistically estimated number of days with exceedances is not to be more than 1 per year.

ppm = Parts of pollutant per million parts of air.

 ug/m^3 = Micrograms of pollutant per cubic meter of air.

^{** =} Statistically estimated number of days with exceedances is not to be more than 1 per year.

^{*** =} Indication of a nuisance condition only.

PPM = Parts of pollutant per million parts of air.

ug/m³ = Micrograms of pollutant per cubic meter of air.

mg/m³ = Milligrams of pollutant per cubic meter of air.


TABLE 1-3
NUMBER OF AMBIENT AIR QUALITY EXCEEDANCES BY COUNTIES(1994)

				COUNTIES															
POLLUT	ANT		< Z D R O N U O 0 0 - Z	A R O O S T O O K	C U M B E R L A N D	FRANKLIN	HANCOCK	KENNEBEC	K N O X	LINCOLN	O X F O R D	P E N O B S C O T	P I S C A T A Q U I S	SAGADAHOC	S O M E R S E T	W A L D O	WASHINGTON	Y O R K	T O T A L S
Fine Parti	culate(PM10):																		
	Annual Arithmetic	Mean* State Federal State Federal	0	0 0 0	0 0 0	0 0	? ? ? ?	0 0	0 0 0	? ? ? ?	0 0	0 0 0	? ? ? ?	? ? ? ?	0 0 0	? ? ? ?	0 0 0	0 0 0	0 0 0
		reaerai	0	U	U	U	7	U	U	,	U	U	,	,	U	,	U	U	١
Lead:	Twenty-four Hour	State Federal				No	moni	toring	g don	e for	this p	olluta	int du	uring 1	1994				
Carbon N	fonoxide: One Hour Eight Hour					No	moni	toring	don don	e for	this p	olluta	nt du	ıring 1	1994				
Nitrogen i	Dioxide:																		
	Annual Arithmetic	c Mean*	7	?	0	7	?	?	?	?	?	?	?	?	7	?	7	?	0
Sulfur Dio	xide:																		
	Annual Arithmetic	c Mean* State	0	0	0	7	7	0	?	7	0	0	7	7	7	7	7	7	0
		Federal	0	0	0	?	?	0	?	7	0	0	?	?	7	7	?	?	0
	Twenty-four Hour	State Federal		0	0	? ?	?	0	? ?	? ?	0 0	0 0	? ?	? ?	? ?	? ?	? ?	? ?	0 0
	Three Hour	State Federal	0	0	0 0	? ?	? ?	0 0	? ?	?	0 0	0 0	? ?	? ?	? ?	? ?	? ?	? ?	0 0
Ozone:	One Hour	State	?	7	68	7	11	29	82	7	7	9	1	89	11	7	15	83	405
	Days	Federal		?	1	?	0	0	0	?	0	0	0	1	0	?	0	ι	3

^{*} Annual Means generated by only a few samples are not included in this summary.


[?] No monitoring done for this pollutant within this county during 1994.

FIGURE 1-1 TOTAL SUSPENDED PARTICULATE TRENDS

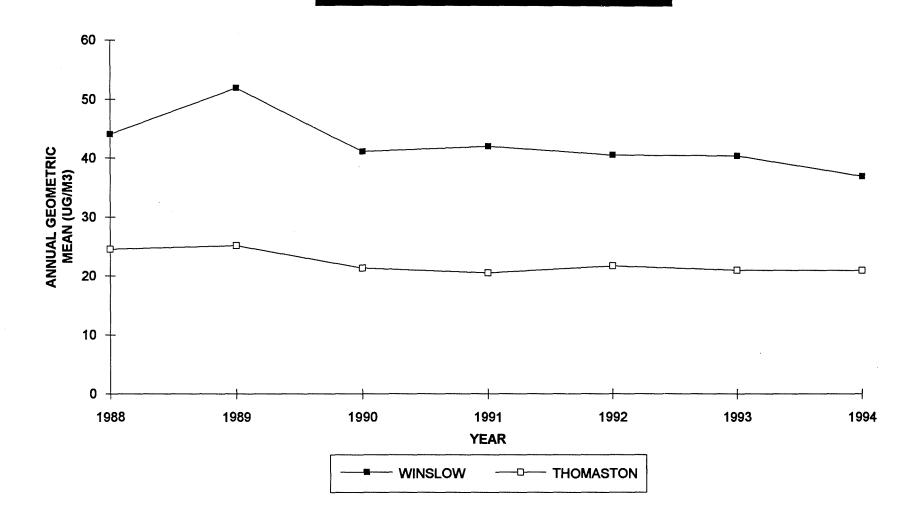


4

FIGURE 1-2A PM10 TRENDS - SOUTHERN MAINE

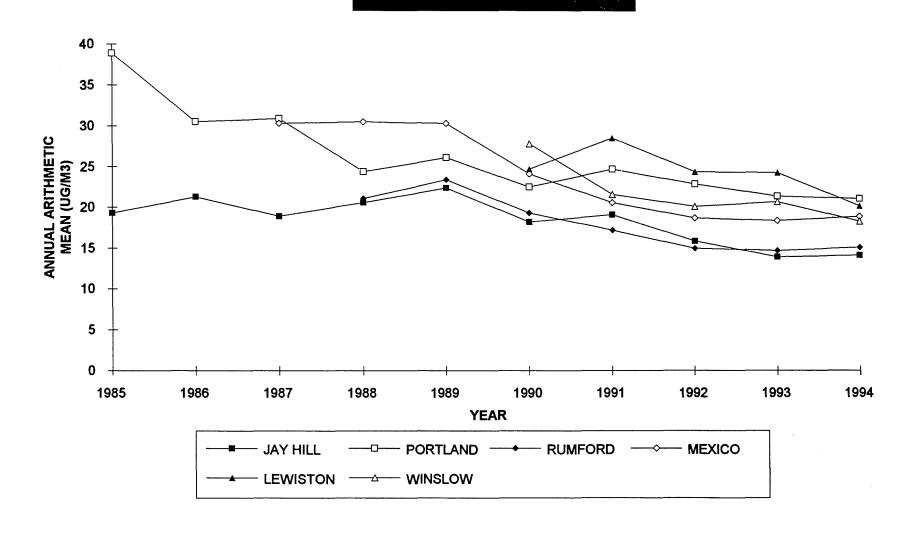

U

FIGURE 1-2B PM10 TRENDS - NORTHERN MAINE

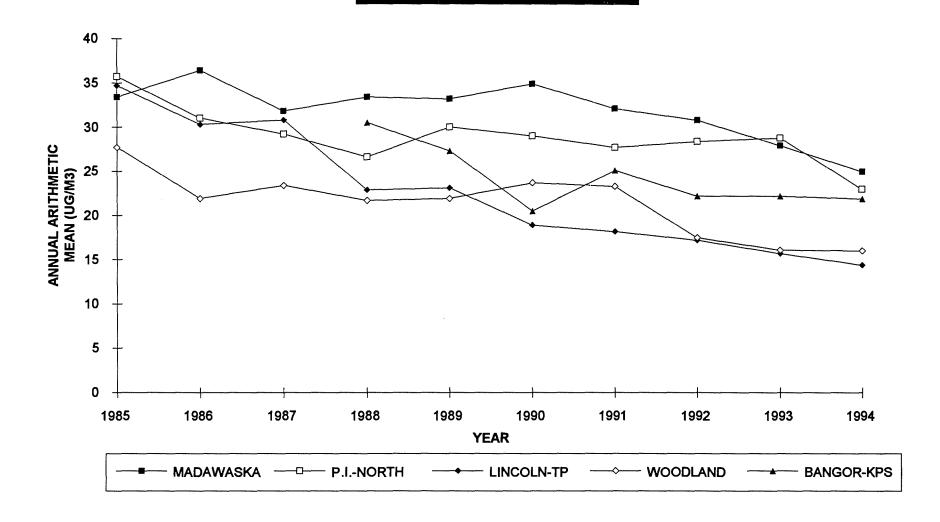

6

FIGURE 1-3A SOUTHERN MAINE SULFUR DIOXIDE TRENDS - 24 HOUR

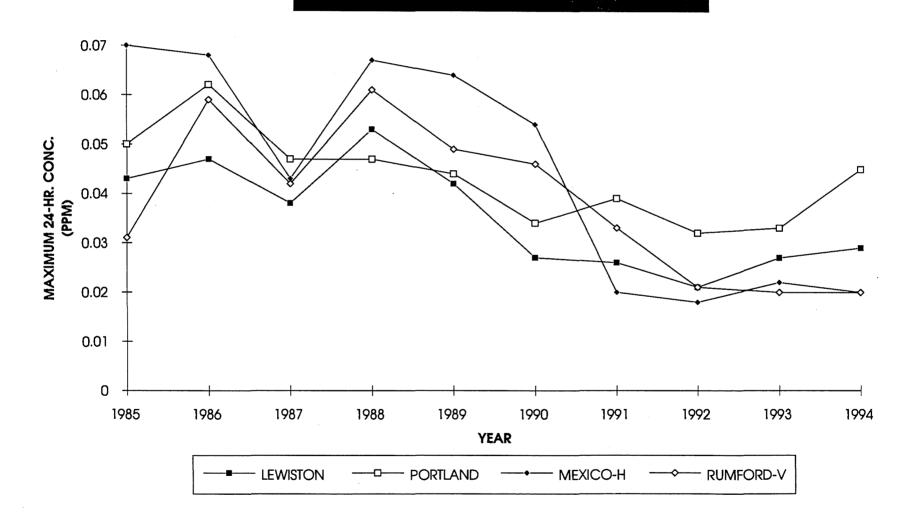


FIGURE 1-3B NORTHERN MAINE SULFUR DIOXIDE TRENDS - 24 HOUR

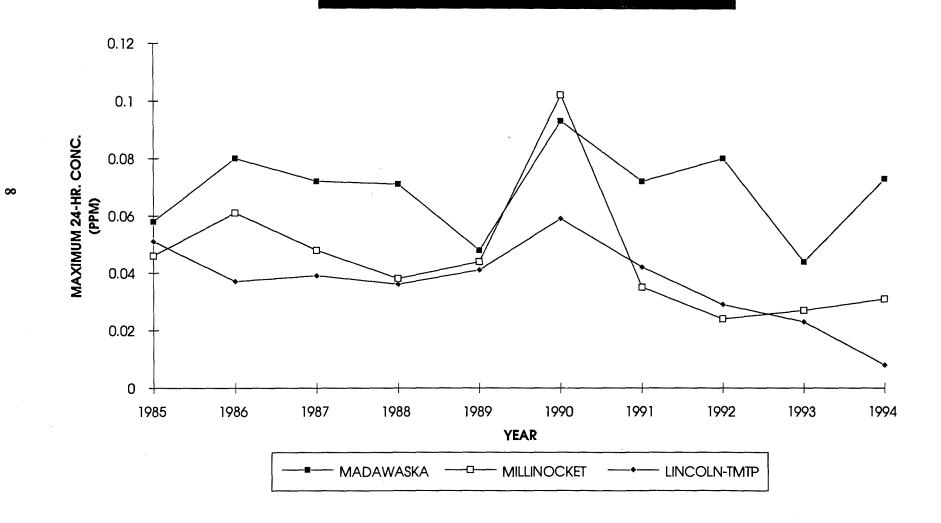


FIGURE 1-4A
SOUTHERN MAINE SULFUR DIOXIDE TRENDS - AAM


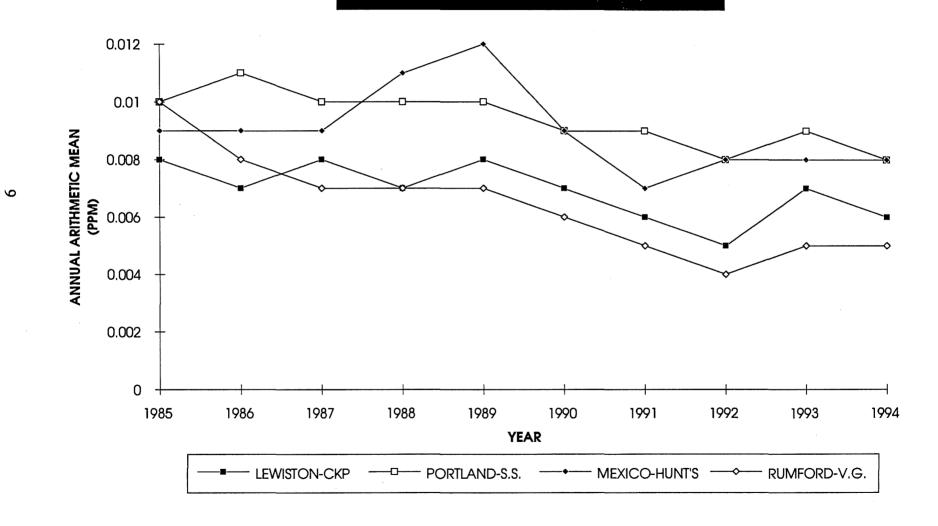


FIGURE 1-4B NORTHERN MAINE SULFUR DIOXIDE TRENDS - AAM

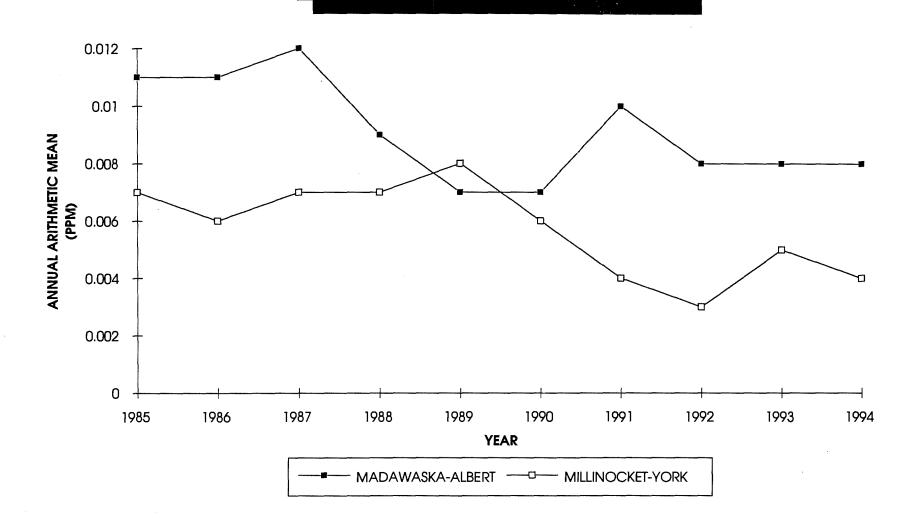

1983 with no significant trend in either direction or in some cases a slight downward trend. In Figure 1-3B there are three sites that show fluctuations in the short term concentrations over the last few years. All three of these sites are in towns with large industrial sources and probably indicate brief periods of upset conditions or unusual meteorological conditions which resulted in the higher concentrations.

Figure 1-5 depicts the number of hourly violations of the State ozone standard. As can be seen from the graphs, the violations vary greatly from year to year and while showing a very significant increase in the number of violations during 1988 there was a significant decrease during 1989 which carried over to later years at most of the sites. Weather conditions are responsible for a lot of the variability from year to year and the conditions during 1988 were very conducive to the formation of ozone while those of subsequent years were not as conducive. Because of the significant effect weather has on the formation of ozone, Maine, as well as the rest of the northeast, will need to control emissions to such a level that even under ideal weather conditions for the formation of ozone, standards will not be exceeded.

Data summarized in this report is available for review in the DEP headquarters in Augusta and copies can be obtained from that office for a nominal fee.

1.2 Description of Air Monitoring Network


The Maine ambient air monitoring network consists of three types of monitoring sites or stations, which are required by the U.S. Environmental Protection Agency as set forth in Title 40 of the Code of Federal Regulations, Part 58 (40 CFR 58). The types of monitoring sites are distinguished from one another on the basis of the general monitoring objectives they are designed to meet. All of the instruments at a particular monitoring site may not have the same designation. The three types of monitoring sites with their monitoring objectives are as follows:

1. State/Local Air Monitoring Station (SLAMS) Network.

The SLAMS network is designed to meet a minimum of four basic monitoring objectives:

- a. To determine highest concentrations expected to occur in the area covered by the network.
- b. To determine representative concentrations in areas of high population density.
- c. To determine the impact on ambient pollution levels of significant sources or source categories.
- d. To determine general background concentrations levels.

FIGURE 1-5 OZONE TRENDS - HOURS OF STATE VIOLATION

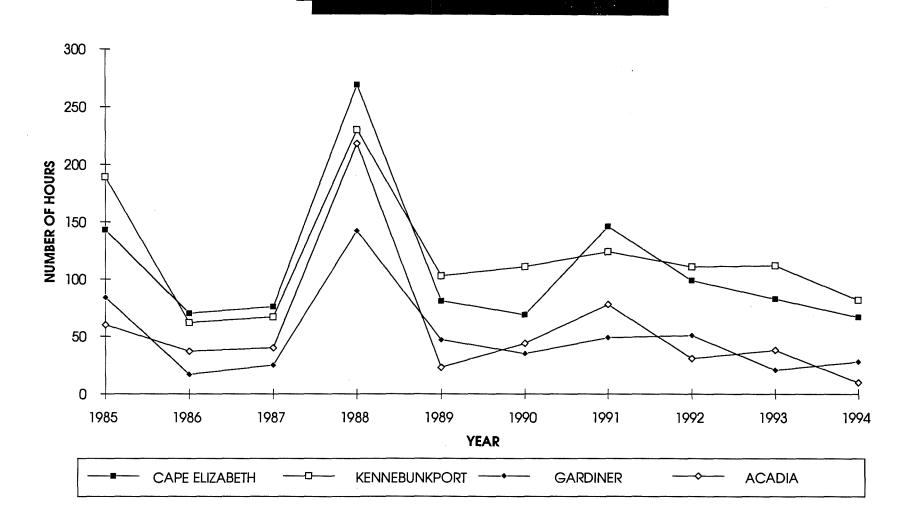

2. National Air Monitoring Station (NAMS) Network.

The NAMS network is a subset of the SLAMS network with the following objectives:

- a. To monitor in the areas where the pollutant concentration and the population exposure are expected to be the highest consistent with the averaging time of the NAAOS.
- b. To monitor in areas of expected maximum concentrations.
- c. To monitor in areas which combine poor air quality with a high population density.
- d. To provide data for national policy analysis/trends and for reporting to the public on major metropolitan areas.

3. Special Purpose Monitoring Station (SPMS) Network.

Any monitoring site that is not a designated SLAMS or NAMS is considered a special purpose monitoring station. Some of the SPMS network objectives are:

- a. To verify the maintenance of ambient air standards in areas not covered by or represented by the SLAMS/NAMS network.
- b. To provide additional data for developing local control strategies and to document their effectiveness.
- c. To provide data on noncriteria pollutants.

The number of monitors operated for the various monitoring types are summarized in Table 1-4. This monitoring network has been fairly stable for the last couple of years. The total suspended particulate network was significantly reduced due to the elimination of the standard and the control of fugitive dust problems. Sulfur dioxide and lead monitoring have also been reduced due to sufficient data having been collected documenting the compliance status and low levels of those pollutants in most areas of the State.

Table 1-5 provides a breakdown of who operated the monitors during 1994. The breakdown indicates most point-source oriented pollutant monitors are operated by the sources which contribute to the problem whereas secondary pollutants or population caused pollutant monitors are generally operated by the DEP, or other governmental agencies.

Air quality data are developed using two basic methods: 1) the continuous monitoring of gaseous pollutants and; 2) the periodic sampling of particulate and gaseous pollutants. In addition to pollutant monitoring there is also the continuous monitoring of meteorological parameters. Ninety-four monitors collected data at seventy-three different sites during 1994.

Continuous gaseous monitoring was done at twenty-seven sites in Maine during 1994. Ozone was monitored at twelve of these stations, nitrogen dioxide at one and sulfur dioxide at fifteen. Carbon monoxide and lead were not monitored during 1994.

Particulate sampling was done at thirty-five sites in Maine during 1994. Five of these stations

TABLE 1-4
DISTRIBUTION OF AIR MONITORING INSTRUMENTS
1994

POLLUTANI	NAMS	SLAMS	<u>SPMS</u>	<u>IOTAL</u>
Fine Particulate	2	16	16	34
Total Suspended Particulate	0	0	5	5
Lead	0	0	0	0
Carbon Monoxide	0	0	0	0
Sulfur Dioxide	2	3	10	15
Nitrogen Dioxide	0	0 *	1	1
Ozone	0	6	6	12
Sulfate	0	0	3	3
WS/WD	0	0	21	21
Atmospheric Depsition	Ω	Q	<u>3</u>	<u>3</u>
Total	4	25	65	94

^{*} The PEOPL site in Portland is a SLAMS site for NOx but was not operated in 1994 and is not included in this summary.

TABLE 1-5
MONITOR OPERATORS DURING 1994

POLLUTANT	DEP*	INDUSTRY**	<u>IOTAL</u>
Fine Particulate	16	18	34
Total Suspended Particulate	0	5	5
Lead	0	0	0
Carbon Monoxide	0	0	0
Sulfur Dioxide	5	10	15
Nitrogen Dioxide	1	0	1
Ozone	וו	1	12
Sulfate	2	1	3
WS/WD	8	13	21
Atmospheric Deposition	<u>3</u>	Q	3
Total	46	48,	94

^{*} Includes other governmental agencies.

^{**} Includes industries and their consultants.

monitored total suspended particulates. Thirty-four of these sites collected fine particulate fractions. Three sites were analyzed for sulfates. There were also three sites collecting acid rain data. One site was operated by the State and the others were operated by the National Park Service and the University of Maine.

In addition to pollutant monitoring, wind speed and direction was recorded at twenty-one sites around the State during 1994. Some of these sites also recorded other meteorological parameters such as sigma (stability) and temperature, precipitation and solar radiation.

Table 1-6 presents all the monitoring sites in Maine that operated during 1994 and indicates which parameters were monitored at each site. The map in Figure 1-6 shows the minor civil divisions within the State.

1.3 Document Organization

This document is divided by pollutant into chapters. Each chapter contains: 1) a description of the nature and sources of that pollutant, 2) its health and welfare effects, 3) a discussion on the standards (current and proposed) for that pollutant, 4) a discussion of the monitoring methods for that pollutant, 5) a table presenting the 1994 monitored data, 6) in the case of some pollutants, historical tables presenting 1994 data along with data for previous years to show trends, effects of control strategy, or change in emission sources.

1.3.1 Explanation of Data Summary Tables

The Data Summary Tables were designed to facilitate comparing 1994 air quality monitoring data with the standards for each pollutant. Therefore, the data are presented for each averaging time for which standards exist for a pollutant.

An annual average concentration is presented for each pollutant that has a long-term, annual standard (NO₂, SO₂, PM10).

For pollutants that have short-term standards, the highest short-term values are presented. Some pollutants are allowed to exceed the standard once during the year so the second highest value would be used to determine whether there was a violation or not.

All of the data collected during 1994 has been presented in the Data Summary Tables. However, in making comparisons of the data, one should be aware that a site with only a few samples will not be a valid indicator of pollutant concentrations in the area.

1.3.2 Explanation of Historical Comparison Tables

The Historical Comparison Tables present air quality data for 1994 and those years prior to 1994 when the same pollutant was monitored at the same site. The purpose of the Tables are to indicate

SITE	ADDRESS	<u>OPERATOR</u>	PARAMETERS MEASURED
ANDROSCOGGIN COUNTY			
Auburn 23 001 0005	Lewiston-Auburn Airport Lewiston Junction Road	DEP	WS/WD
Lewiston 23 001 0011	Country Kitchen Parking Lot Canal Street	DEP	SO2,FP
Livermore Falls 23 001 0013	James River/Otis Mill Route 4	James River Corp.	WS/WD,Temperature
Livermore Falls(NEW) 23 001 2002	10-12 Millett Street	International Paper	SO2
Lewiston(NEW) 23 001 3002	Birch Street	DEP	SO2,FP
AROOSTOOK COUNTY			
Madawaska 23 003 0006	Fraser Paper Company Bridge Street	Fraser Paper	WS/WD,Temperature
Madawaska 23 003 0009	Albert Street	Fraser Paper	SO2,Precipitation
Madawaska 23 003 0012	U. S. Post Office 430 E. Main Street	Fraser Paper	SO2,WS/WD
Madawaska 23 003 0013	Big Daddy's Restaurant 395 E. Main Street	DEP	FP .
Madawaska 23 003 1003	Madawaska High School 7th Avenue	Fraser Paper	SO2
Presque Isle 23 003 1005	Northeastland Hotel 436 Main Street	DEP	FP
Presque Isle 23 003 1008	DEP Regional Office 528 Central Drive	DEP	WS/WD,FP
Presque Isle 23 003 1011	Riverside Street	DEP	FP,SO2(n)
CUMBERLAND COUNTY			
Bridgton 23 005 0002	Upper Ridge Road	DEP	FP,Sulfate(n),Acid Precipitation
Portland 23 005 0010	Cheverus High School Ocean Avenue	DEP	WS/WD
Portland 23 005 0014	Shelter Site(P.E.O.P.L.) Elm Street	DEP	SO2,FP,Sulfate
Portland 23 005 0015	Tukey's Bridge	DEP	FP .

SITE	<u>ADDRESS</u>	<u>OPERATOR</u>	PARAMETERS MEASURED
South Portland 23 005 0022	130 Wescott Road	DEP	FP
Westbrook 23 005 1009	S. D. Warren Co. Wind S. D. Warren Property	S. D. Warren	WS/WD,Temperature
Cape Elizabeth 23 005 2003	Shelter Site Two Lights State Park	DEP	Ozone(s),WS/WD(s),NO2(s), NO(s),NOx(s),Temperature,Relative Humidity,Solar Radiation
FRANKLIN COUNTY			•
Jay 23 007 0003	Crash Road Gilbert Jewell Property	International Paper	FP(n)
Jay 23 007 0004	Jay Hill Bomaster Property	International Paper	FP
Jay 23 007 2001	Weather Level I Lagoon Hill	International Paper	WS/WD,Temperature, Solar Radiation, Precipitation
HANCOCK COUNTY			
Acadia National Park 23 009 0003	McFarland Hill Ranger Sta. Route #233	NPS	Acid Precipitation, Precipitation
Acadia NP 23 009 0101	Acadia NP Route #233	DEP	Ozone,WS/WD,Temperature, Dewpoint
KENNEBEC COUNTY			
Augusta 23 011 0008	Governor's Hangar State Airport	DEP	WS/WD
Augusta 23 011 0014	Rines Hill Parking Lot Water Street	DEP	FP
Waterville 23 011 1004	Front Street Municipal Park	DEP	SO2(d)
Winslow 23 011 2003	Gulley Hill Road	Scott Paper Company	TSP
Winslow 23 011 2004	Boston Avenue	Scott Paper Company	TSP,FP
Gardiner 23 011 2005	Pray Street School	DEP	Ozone(s)
KNOX COUNTY			
Isle Au Haut 23 013 0003	Isle Au Haut Fire Station	DEP	Ozone(s)
Port Clyde 23 013 0004	Port Clyde Ozone St. George	DEP	Ozone(s)

SITE	ADDRESS	OPERATOR	PARAMETERS MEASURED
Thomaston 23 013 1005	Dragon Cernent Weather Route #1	Dragon Products	WS/WD
Thomaston 23 013 2001	Mitchell Property 2 Dexter Avenue	Dragon Products	TSP,FP
OXFORD COUNTY			
Mexico 23 017 0008	Labonville's Route #2	Boise Cascade	FP
Mexico 23 017 0011	Hunt's Property Route #2	Boise Cascade	SO2
Rumford 23 017 2002	Boise Cascade Weather II Swift River Pump House	Boise Cascade	WS/WD,Temperature,Solar Radiation
Rumford 23 017 2005	Taylor Mountain I	Boise Cascade	SO2,Sulfate,FP
Rumford 23 017 2006	Taylor Mountain II	Boise Cascade	SO2
Rumford 23 017 2007	Village Green Site	Boise Cascade	SO2,FP
North Lovell 23 017 3001	DOT Garage Route #5	DEP	Ozone(s)
PENOBSCOT COUNTY			
Bangor 23 019 0002	Kenduskeag Pump Station Washington Street	DEP	FP
Bangor 23 019 0010	BIA - Building #489 Air National Guard	DEP	WS/WD
Brewer(DISC) 23 019 1002	Brewer Junior High School 5 Somerset Street	DEP	FP
Lincoln 23 019 1007	Thomas Motel Trailer Park 39 West Broadway	Lincoln Pulp & Paper	TSP(d),SO2(d),FP
Lincoln(DISC) 23 019 1011	Lincoln Street	Lincoln Pulp & Paper	FP
Lincoln 23 019 1012	Penobscot River	Lincoln Pulp & Paper	FP
Lincoln 23 019 1013	Lincoln Mill Katahdin Avenue	Lincoln Pulp & Paper	WS/WD,Temperature
Lincoln 23 019 2003	Lincoln Post Office Building 50 Fleming Street	Lincoln Pulp & Paper	TSP(d),FP

SITE	ADDRESS	<u>OPERATOR</u>	PARAMETERS MEASURED
Millinocket 23 019 2009	York Street	Great Northern Paper	SO2,FP
Millnocket 23 019 2013	Mill Stone Dam	Great Northern Paper	WS/WD,Temperature
Old Town(DISC) 23 019 4003	Marsh Island Apartments 100 Main Street	DEP	FP
Howland 23 019 4007	Meadow Brook Road	DEP	Solar Radiation, Uv-B Radiation
Holden 23 019 4008	Summit of Rider Bluff	DEP	Ozone(s)
Old Town 23 019 5004	Woodlands Garage James River Corporation	James River Corp.	WS/WD,Temperature
Orrington(DISC) 23 019 8001	Center Drive School	Penob. Energy Rec.	FP
Hampden(DISC) 23 019 8011	McGraw School	Penob. Energy Rec.	FP
PISCATAQUIS COUNTY			
Greenville 23 021 0001	Squaw Brook Greenville	University of Maine	Acid Precipitation, Precipitation
Greenville 23 021 0002	Greenville Municipal Airport	DEP	Ozone(s),WS/WD(n)
SAGADAHOC COUNTY	4		
Phippsburg 23 023 0003	Small Point Navy Road	DEP	Ozone(s)
SOMERSET COUNTY			
Madison 23 025 1004	The Ballfield Main Street	Madison Paper Ind.	WS/WD,Temperature
Skowhegan 23 025 2001	Hinckley Hinckley Farm School	S. D. Warren	FP
Skowhegan 23 025 2002	Eaton Ridge	S. D. Warren	FP
Skowhegan 23 025 2003	Somerset Mill S. D. Warren	S. D. Warren	WS/WD,Ozone,Temperature
WASHINGTON COUNTY			
Woodland 23 029 0007	Secondary Treatment Pipeline	Georgia Pacific Corp.	FP .

SITE	ADDRESS	OPERATOR	PARAMETERS MEASURED
Woodland 23 029 0008	Woodland High School	Georgia Pacific Corp.	FP
Woodland 23 029 0018	Background	Georgia Pacific Corp.	FP
Jonesport 23 029 0019	Public Landing	DEP	Ozone(s)
Woodland 23 029 0020	100 Meter Tower	Georgia Pacific Corp.	WS/WD,Temperature, Dewpoint
YORK COUNTY			
Biddeford 23 031 0005	Eagles Aeria 57 Birch Street	DEP	FP
Kennebunkport 23 031 2002	Parson's Way	DEP	Ozone(s)


(AIRS Site #)

NEW	-Site established in 1993
DISC	-Site discontinued in 1993
TSP	-Total Suspended Particulate
SO2	-Sulfur Dioxide
NO	-Nitric Oxide
NOx	-Oxides of Nitrogen
NO2	-Nitrogen Dioxide
co	-Carbon Morioxide
Pb	-Lead
NSMD	-Wind Speed and Direction
FP	-Fine Particulate
NMHC	-Nonmethane Hydrocarbons
	•

n -Instrument installed during 1993 d -Instrument removed during 1993

s -Instrument operated seasonally during 1993 i -Instrument operated intermittently

during 1993

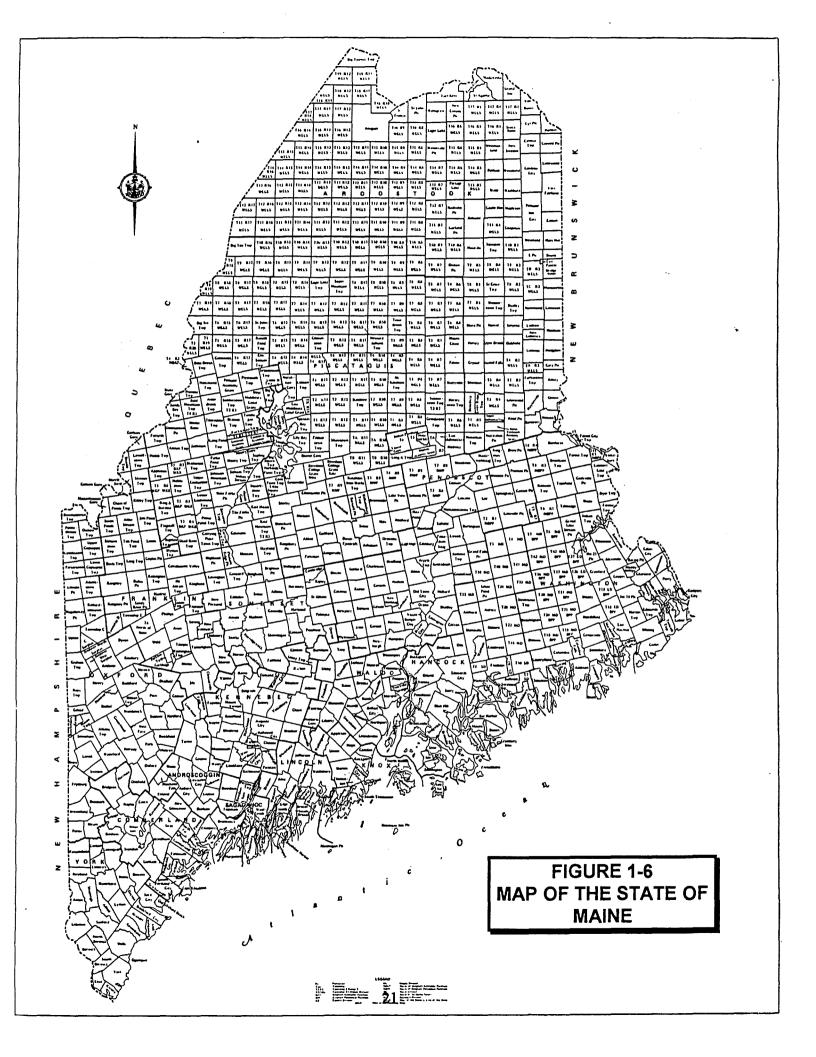

the variations in air quality from year to year. The Tables in some cases represent maximum concentrations for specific time periods and in others the number of days in each year that the standards were violated.

1.3.3 Explanation of Trends Tables

The highest hourly concentration in a year is not the best indicator of long-term air quality trends because it is an erratic value. Therefore, special trend tables are presented for carbon monoxide and ozone when monitoring is conducted. The trend tables present the 10th, 50th, and 90th percentile values to represent the bulk of the air quality data for each year. Percentiles indicate the fraction, or percent, of the value that are below a particular level. For example, if the 90th percentile value for some sets of CO observations is 5.0 ppm, it means that 90% of the time the concentrations of CO are less than 5.0 ppm. Conversely, it also means that 10% of the time the concentrations are above 5.0 ppm. Thus the existence or lack of long-term trends in overall air quality for CO and O3 can be more reliably determined using the Trends Tables, than by looking at just the Historical Comparison Tables.

The ozone data has been incorrectly interpreted in the past and consequently the trends tables have not reported the ozone data in a consistent format. Starting in 1988 data was stored in the AIRS database instead of the old SAROAD system. Under the SAROAD system reports were generated which indicated the percentiles or frequency distribution of all the hourly data values reported. Reports generated under the AIRS system are now based on percentiles calculated based on each days maximum hourly value. Thus, a 50th percentile of .050 ppm means that 50% of the days monitored had a maximum hourly value during the day of .050 ppm or less. All of the trend information for ozone beginning with the 1991 Annual Report have been revised to reflect this method of calculation based on the AIRs report format. If a report format can be developed that will provide percentiles based on total hourly values then that statistic will be used in future reports as it is a better indicator of total exposure to high ozone levels.

2. CARBON MONOXIDE (CO)

2.1 Description and Sources

Carbon monoxide is colorless, odorless and tasteless gas. Therefore you do not even know you are breathing it until you feel its detrimental effects. It constitutes the largest single fraction of the pollutants found in urban atmospheres. It is produced primarily by the incomplete combustion of organic materials used as fuels for transportation and in the heating of buildings; it also results from industrial processes, refuse burning, and agricultural burning. Several natural sources of CO of both biological and non-biological origin have also been identified, but their contributions to urban atmospheric concentrations are thought to be small. Background levels of CO (resulting from natural and technological sources) found in relatively nonpolluted air range from 0.025 to 1.0 ppm. Urban carbon monoxide is produced primarily by motor vehicles.

Because motor vehicle traffic is the major source of CO, daily concentration peaks coincide with morning and evening rush hours. The worst carbon monoxide problems are found where large numbers of slow moving cars congregate. These problems are further aggravated when they occur in a "street canyon" situation. When there are large amounts of slow moving traffic in a street canyon situation, with the wind blowing perpendicular to the street, carbon monoxide can be trapped in the canyon and build up to unhealthful levels.

CO problems are usually worse in winter because: 1) cold weather makes motor vehicles run dirtier and requires more combustion for space heating; and 2) on winter nights a strong inversion layer develops in the atmosphere, that traps pollution near the ground, preventing it from mixing with cleaner air above.

2.2 Health and Welfare Effects

Carbon monoxide affects the central nervous system by depriving the body of the oxygen it needs. Tests of automobile drivers show exposure to carbon monoxide can impair driver's judgement and ability to respond rapidly in traffic. It can also impair vision and produce headaches.

Carbon monoxide enters the bloodstream by combining with hemoglobin, the substance that carries oxygen to the cells. Hemoglobin that is bound up with CO is called carboxyhemoglobin. This combination occurs 200 times more readily with CO than with oxygen, so the amount of oxygen being distributed throughout the body by the bloodstream is reduced in CO's presence. Blood laden with CO can weaken heart contractions, lowering the volume of blood distributed to various parts of the body. It can also significantly reduce a healthy person's ability to perform manual tasks, such as working, jogging and walking. A life-threatening situation exists in patients with heart disease, who can't compensate for the oxygen loss. The 4.2 million people in the U.S. suffering from angina pectoris (a heart disease characterized by brief spasmodic attacks of chest pain due to insufficient oxygen levels in the heart muscles) are especially susceptible. Carbon monoxide is also harmful to persons who have lung disease, anemia or cerebral-vascular disease. Others sensitive to carbon monoxide include the human fetus, and people exposed to long-term concentrations, such as

traffic officers.

People who sit in idling cars over sustained periods risk harmful CO exposure, as do cigarette smokers. Since about two percent of cigarette smoke is carbon monoxide, if you or someone else smokes while driving in heavy traffic, you may both experience the harmful effects of CO from the cigarette smoke and the engine exhaust accumulated in streets. Even three or four hours after you're exposed, half the excess CO still remains in your bloodstream. Because it takes time for CO to build up in the bloodstream, the severity of health effects depends both on the concentration being breathed and the length of time the person is exposed.

2.3 Standards

The existing standards for carbon monoxide are currently set at 9 parts CO per million parts air (ppm), averaged over a period of 8 hours, and 35 ppm averaged over 1 hour, not to be exceeded more than once per year. As a result of a review and revision of the health criteria, EPA had proposed to retain the existing primary 8-hour standard at 9 ppm and to lower the primary 1-hour standard to 25 ppm. However, this change has not occurred and the standards remain the same. The change in the 1-hour standard had been proposed because of the more rapid accumulation of blood carboxyhemoglobin in moderately exercising sensitive persons compared to resting individuals. The impact of exercise, which is greater for short-duration exposures, was not considered in the original standard.

2.4 Monitoring

Carbon monoxide was not monitored in Maine during 1994.

3. OZONE (03)

3.1 Description and Sources

Ozone is a highly reactive form of oxygen which, at very high concentrations, is a blue unstable gas that has a characteristic pungent odor most commonly identified around an arcing electric motor, lightning storms, or other electrical discharges. However, at normal ambient concentrations, ozone is colorless and odorless. Ozone is the major component of photochemical "smog", but the haziness and odors of smog are primarily caused by other components.

Natural ground level ozone occurs in low concentrations (less than .05 ppm) due to natural physical and chemical phenomena. Occasionally, unique meteorological conditions can result in natural levels between .05 and .10 ppm.

Ozone is not emitted directly from a source as are other pollutants. It forms as a secondary pollutant. It's precursors are hydrocarbons and nitrogen oxides, which chemically react in sunlight to form ozone. The hydrocarbons are emitted in automobile exhaust, from gasoline and oil storage and transfer, and from industrial use of paint solvents, degreasing agents, cleaning fluids, ink solvents, incompletely burned coal or wood and many other sources. Plants also give off hydrocarbons such as terpenes from pine trees. Nitrogen oxides are emitted by all combustion sources.

The highest ozone levels generally occur during summer afternoons when the high temperatures and strong sunlight promote photochemical reactions. Stagnant weather may cause smog to remain in an area for several days. The winds may also transport ozone many miles outside of the urban environment. For example, it is estimated that the majority of the ozone in the State of Maine is transported into the State from sources located outside the State. In addition a much smaller amount of the ozone is naturally occurring background concentrations, part of which is also transported into the State. The remaining ozone is assumed to be due to local sources within the State. Because of long-range transport, local control of emissions by itself may not solve the ozone problem. An effective national program may be necessary to achieve national compliance.

Ground-level ozone, discussed above, should not be confused with the stratospheric ozone layer, located about seven miles high in the atmosphere, which shields the earth from cancer-causing ultraviolet rays. Concentrations of ozone in this layer may reach as high as 10 ppm. Concern over potential reduction of the necessary levels of ozone in the stratosphere by reactions with fluorocarbons from aerosol cans has resulted in the removal of most of these propellants from the market. However, ozone at ground level, where it is breathed, is a pollutant.

3.2 Health and Welfare Effects

Ozone at low concentrations causes eye irritations and at higher concentrations difficulty in breathing for people with respiratory problems, the elderly, and children. Symptoms associated with exposure to higher concentrations of ozone are shortness of breath, pain when inhaling deeply,

wheezing and coughing. Even healthy adults and children may be affected. Many plants, such as white pine, soybeans and alfalfa, are extremely sensitive to ozone, and ozone is known to weaken materials such as rubber and fabrics.

3.3 Standards

The existing National Ambient Air Quality Standard (NAAQS) for ozone is 0.12 ppm and will be attained when "the expected number of days per calendar year with maximum hourly average concentrations above 0.12 ppm is equal to or less than one." This standard was effective February 8, 1979 and replaced a more restrictive 0.08 ppm standard that was established April 10, 1971. The change was the result of a required assessment of existing NAAOS to include a review of new health effects data that have become available since 1970. As a result of this review and national public comments, the standard was changed to a level that is considered to be sufficient to protect the public health and welfare. Since then additional research has concluded that there is in fact damage being caused by ozone levels less than the existing Federal standard. Based on recent studies there appears to be significant vegetation damage at levels considerably below the Federal standard and some "adverse" health effects at the current Federal standard. As of the date this report was compiled no proposals have been made for changing the Federal standard. The current State Standard is .081 ppm. It was established at the same time the original Federal Standard was established and has not been changed. In the past the State standard was interpreted to be .080 ppm but a conversion of the actual 160 ug/m3 standard to ppm yields .081. Therefore, only hourly averages in excess of .081 ppm are considered exceedances of the State standard.

3.4 Monitoring

Ozone was monitored at twelve sites in Maine during 1994 using continuous monitoring equipment of two kinds, either chemiluminescence or ultra-violet absorption analyzers. Maine's ozone monitoring season is limited to April through October due to the weather conditions which are not conducive to ozone formation at other times of the year.

Table 3-1 is the 1994 Data Summary for Ozone. Table 3-2 presents the Ozone Historical Comparisons and Table 3-3 presents the Ozone Trends. Tables 3-4 and 3-5 summarize the number of days during each month when either the state or federal standards have been exceeded. Exceeding a standard does not necessarily mean a violation. Both standards allow for an exceedance before a violation is recorded. Table 3-4 is an analysis and summary of the ozone data based on the state standard. The state standard is an hourly value and consequently the summary deals with hours of data. Theoretically, you can have 24 exceedances of the state standard in one day. Data recovery includes total hours during the year in which monitored data is available, total hours during the ozone season of April 1 through October 31 in which monitored data is available and the percent of monitored hours of data during the ozone season. The second, third and fourth high hourly maximums could all have occurred on the same day as the highest hourly value. The last column in this table lists the separate days on which at least one hourly exceedance of the state standard occurred. Table 3-5 summarizes the ozone data based on the federal standard. The federal standard only requires one hour of monitored data to exceed .12 ppm to be considered as

an exceedance of the federal standard. Ozone data is recorded to three decimal places but the federal standard is only two decimal places. Therefore, the third decimal place is rounded off and the monitored value must be .125 or greater to exceed the standard of .12 ppm. The percent data recovery in this table is based on the number of valid days of data collected during the ozone season. One hour of data greater than .12 ppm is sufficient to consider a day valid even if it is the only valid hour of data for the entire day. Otherwise, 75% of the data collected between the hours of 9:01 a.m. and 9:00 p.m. local time must be valid for the day to be considered a valid day(See 40 CFR Ch. 1 Pt. 50, Appendix H). The high, second high, third high and fourth high hourly maximums are all on separate days. The measured exceedances are actual measured values or days that exceeded the standard. The estimated exceedances takes into account missing data which may have been during high periods of ozone. The last two columns are explained in a footnote at the end of the table. Tables 3-6 and 3-7 summarize the data collected over the years at those sites which were in operation during 1994. They include a monthly breakdown of the number of days on which either the state or federal standard was exceeded as well as the number of sites that were in operation.

The ozone data has been incorrectly interpreted in the past and consequently the trends tables have not reported the ozone data in a consistent format. Starting in 1988 data was stored in the AIRS database instead of the old SAROAD system. Under the SAROAD system reports were generated which indicated the percentiles or frequency distribution of all the hourly data values reported. Reports generated under the AIRS system are now based on percentiles calculated based on each days maximum hourly value. Thus, a 50th percentile of .050 ppm means that 50% of the days monitored had a maximum hourly value during the day of .050 ppm or less. All of the trend information for ozone beginning with the 1991 Annual Report have been revised to reflect this method of calculation based on the AIRs report format. If a report format can be developed that will provide percentiles based on total hourly values then that statistic will be used in future reports as it is a better indicator of total exposure to high ozone levels.

TABLE 3-1 1994 OZONE DATA SUMMARY

(Parts Per Million)

		(1 di 10 1 Ci 14 iiii)	511)			
SITE	ADDRESS .	NUMBER OF OBSERVATIONS	HOURLY CON HIGHEST	CENTRATIONS 2ND HIGH		MBER EDANCES <u>FEDERAL**</u>
CUMBERLAND COUNTY Cape Elizabeth	Shelter Site	6262	0.148	0.135	68	1
HANCOCK COUNTY Acadla National Park	McFarland Hill Ranger Station	8200	0.102	0.095	11	0
KENNEBEC COUNTY Gardiner	Pray Street School	5326	0.120	0.111	29	0
KNOX COUNTY Isle Au Haut Port Clyde	Isle Au Haut Fire Station Port Clyde Ozone	3833 4360	0.116 0.124	0.115 0.123	34 48	0 0
OXFORD COUNTY Lovell	Route #5	4219	0.102	0.099	7	0
PENOBSCOT COUNTY Holden	Summit of Rider Bluff	3758	0.106	0.101	9	0
PISCATAQUIS COUNTY Greenville	Greenville Municipal Airport	5732	0.084	0.08	1	. 0
SAGADAHOC COUNTY Phippsburg	Navy Road	4069	0.148	0.128	89	1
SOMERSET COUNTY Skowhegan	Somerset Mill	4653	0.096	0.095	11	0
WASHINGTON COUNTY Jonesport	Public Landing	4427	0.104	0.098	15	0
YORK COUNTY Kennebunkport	Parson's Way	3820	0.141	0.125	83	1

<sup>Total number of hours greater than .081 ppm. Subtract one for number of violations.
Measured number of days with an hour that exceeds .12 ppm. Not a statistical estimate.</sup>

TABLE 3 - 2 OZONE HISTORICAL COMPARISONS

(1-Hour Concentrations)

	Shelter S			KENNEBUN Parson's		·	JONESPOI Public Land	
YEAR 1978 1979 1980 1981 1982 1983 1984 1985 1986	SECOND HIGH .160 PPM .155 PPM .178 PPM .122 PPM .140 PPM .163 PPM .146 PPM .165 PPM .165 PPM	# OF STATE VIOLATIONS 202 116 141 98 117 187 156 143 70	YEAR 1982 1983 1984 1985 1986 1987 1988 1989	SECOND <u>HIGH</u> .120 PPM .148 PPM .147 PPM .168 PPM .145 PPM .168 PPM .147 PPM .162 PPM	# OF STATE VIOLATIONS 42 151 179 189 62 67 230 103 111	YEAR 1989 1990 1991 1992 1993 1994	SECOND HIGH .099 PPM .106 PPM .117 PPM .103 PPM .103 PPM .098 PPM	# OF STATE VIOLATIONS 18 17 69 37 18 14
1987 1988 1989 1990 1991 1992 1993	.152 PPM .168 PPM .136 PPM .144 PPM .141 PPM .125 PPM .116 PPM	76 269 81 69 146 99 83 67	1991 1992 1993 1994	.150 PPM .127 PPM .127 PPM .125 PPM	124 111 112 82			
Gardine	GARDIN er H.S./Pray	ER Street School	МсГа	ACAD Irland Hill Ro	NA anger Station		ISLE AU HA u Haut Fire	

	SECOND	# OF STATE		SECOND	# OF STATE		SECOND	# OF STATE
YEAR	HIGH	VIOLATIONS	<u>YEAR</u>	<u>HIGH</u>	VIOLATIONS	YEAR	HIGH	VIOLATIONS
1981	.122 PPM	31	1983	.135 PPM	97	1986	.107 PPM	25
1982	.120 PPM	55	1984	.130 PPM ·	84	1987	.151 PPM	87
1983	.140 PPM	97	1985	.117 PPM	60	1988	.185 PPM	241
1984	.112 PPM	88	1986	.108 PPM	37	1989	.115 PPM	35
1985	.133 PPM	84	1987	.126 PPM	40	1990	.131 PPM	55
1986	.110 PPM	17	1988	.153 PPM	218	1991	.136 PPM	123
1987	.112 PPM	25	1989	.113 PPM	23	1992	.109 PPM	79
1988	.145 PPM	142	1990	.118 PPM	44	1993	.113 PPM	33
1989	.118 PPM	47	1991	.125 PPM	78	1994	.115 PPM	33
1990	.107 PPM	35	1992	.105 PPM	31			
1991	.123 PPM	49	1993	.104 PPM	38			
1992	.111 PPM	51	1994	.095 PPM	10			
1993	.096 PPM	21						
1994	.111 PPM	28						•

TABLE 3 - 3
OZONE TRENDS
(1-Hour Concentrations)

		LIZABETH ter Site				SUNKPORT n's Way		*		ESPORT	
	31161	iei siie	•		Puiso	iis way	•		Public	Landing	
	F	PERCENTILE	S		F	PERCENTILE	S .		1	PERCENTILE	S
YEAR	<u> 10%</u>	<u>50%</u>	<u>90%</u>	<u>YEAR</u>	<u> 10%</u>	<u>50%</u>	<u>90%</u>	YEAR	<u> 10%</u>	<u>50%</u>	90%
1978	0.018	0.026	0.054	1983	0.028	0.460	0.103	1989	0.024	0.038	0.071
1979	0.038	0.053	0.106	1984	0.031	0.049	0.103	1990	0.019	0.038	0.063
1980	0.033	0.049	0.097	1985	0.038	0.056	0.098	1991	0.027	0.039	0.068
1981	0.030	0.047	0.086	1986	0.033	0.048	0.077	1992	0.027	0.040	0.066
1982	0.033	0.052	0.082	1987	0.033	0.046	0.074	1993	0.026	0.036	0.057
1983	0.034	0.049	0.095	1988	0.035	0.052	0.119	1994	0.029	0.046	0.068
1984	0.034	0.051	0.100	1989	0.036	0.052	0.085			3.3.5	
1985	0.037	0.052	0.092	1990	0.035	0.050	0.089				
1986	0.032	0.048	0.075	1991	0.038	0.050	0.088				
1987	0.034	0.048	0.074	1992	0.033	0.047	0.086				
1988	0.033	0.050	0.106	1993	0.031	0.047	0.087				
1989	0.034	0.048	0.070	1994	0.034	0.052	0.085				
1990	0.031	0.046	0.077	Percentiles		during 1985 o					
1991	0.034	0.048	0.089	of the data			, 4004 / 5/6				
1992	0.032	0.046	0.079	0	•						
1993	0.028	0.041	0.077								
1994	0.032	0.047	0.076								
	GAI	RDINER			A C	ADIA	·		ICIE A	U HAUT	
Card		Pray Street	School	Mol		ראס I Ranger St	ation	1.		at Fire Static	~~
Guiu	ii iei 11. 3./1	ridy sileei	3011001	IVICI	undia iii	ı kuriger sı	GIIOII	13	sie Au nui	i rite sidit	ווכ
	F	PERCENTILE	S		F	PERCENTILE	S		ı	PERCENTILE	S
YEAR	<u> 10%</u>	<u>50%</u>	<u>90%</u>	YEAR	<u> 10%</u>	<u>50%</u>	<u>90%</u>	YEAR	10%	<u>50%</u>	<u>90%</u>
1980	0.032	0.046	0.088	1983	0.020	0.045	0.080	1986	0.024	0.040	0.077
1981	0.029	0.045	0.073	1984	0.030	0.045	0.087	1987	0.033	0.045	0.078
1982	0.028	0.047	0.073	1985	0.030	0.043	0.079	1988	0.028	0.058	0.122
1983	0.033	0.047	0.083	1986	0.030	0.042	0.063	1989	0.025	0.036	0.069
1984	0.030	0.046	0.081	1987	0.026	0.044	0.068	1990	0.028	0.048	0.076
1985	0.033	0.049	0.082	1988	0.031	0.049	0.097	1991	0.033	0.048	0.088
1986	0.027	0.043	0.062	1989	0.031	0.047	0.069	1992	0.029	0.044	0.075
1987	0.028	0.041	0.065	1990	0.033	0.044	0.070	1993	0.028	0.040	0.071
1988	0.027	0.049	0.087	1991	0.030	0.043	0.078	1994	0.030	0.046	0.071
1989	0.034	0.047	0.073	1992	0.026	0.038	0.068			=	
1990	0.034	0.048	0.075	1993	0.029	0.042	0.062				
1991	0.031	0.044	0.074	1994	0.029	0.045	0.071				
1992	0.030	0.044	0.072								
1993	0.026	0.039	0.064								
1994	0.029	0.044	0.067								
Site reloca	ted to the P	ray Street Sch	1001 in 1991 .								

TABLE 3 - 4
SUMMARY OF HOURLY OZONE DATA FOR SITES OPERATING DURING 1994

			Hourt	y Data Rec	overy*		Hourly M	laximums		Nui	mber of H	iours(in P	PM Rang	ges)	Total	Annual	Days with
		:	Total	Ozone	Percent	Max.	2nd	3rd	4th	>.081	>.090	>.100	>.110	>.120	Hours	Arithmetic	Hour
Site		Year	Hours	Season	Recovery	Hour	High	High	High	<.091	<.101	<.111	<.121		>.081 ppm	Mean	> .081 ppm
CUMBERLAND C	OUNTY																
Cape Elizabeth	Shelter Site	1981	3877	3877	75.5%	0.142	0.136	0.135	0.134	43	24	14	8	10	99	0.0532	20
		1982	4101	4101	79.8%	0.142	0.140	0.137	0.136	45	25	21	10	16	117	0.0560	18
		1983	5011	5011	97.6%	0.172	0.163	0.152	0.152	61	51	30	21	25	188	0.0579	36
		1984	4747	4747	92.4%	0.171	0.166	0.147	0.146	49	49	20	17	22	157	0.0593	31
		1985	4000	3937	76.7%	0.167	0.165	0.158	0.151	60	40	11	8	25	144	0.0592	27
		1986	4954	4954	96.5%	0.131	0.128	0.126	0.119	27	27	11	3	3	71	0.0516	13
	1	1987	5165	5037	98.1%	0.156	0.152	0.141	0.138	23	19	8	10	17	77	0.0523	15
		1988	4953	4953	96.4%	0.178	0.168	0.166	0.164	76	86	39	26	43	270	0.0595	35
		1989	4627	4627	90.1%	0.146	0.136	0.134	0.130	32	22	12	9	7	82	0.0519	16
		1990	4645	4645	90.4%	0.148	0.144	0.130	0.129	35	16	9	4	6	70	0.0505	17
#		1991	4815	4815	93.8%	0.145	0.141	0.139	0.137	65	27	21	15	19	147	0.0546	28
		1992	4805	4805	93.6%	0.128	0.125	0.118	0.115	44	27	20	7	2	100	0.0508	17
		1993	4798	4798	93.4%	0.122	0.116	0.112	0.106	48	24	9	2	1	84	0.0468	17
		1994	6262	4876	94.9%	0.148	0.135	0.122	0.121	36	21	6	1	4	68	0.0512	16
HANCOCK COUN	ITY																
Bar Harbor	Acadia Nat. Pk.	1982	2049	609	11.9%	0.055	0.055	0.050	0.050	0	0	0	0	0	0	0.0313	0
		1983	7560	4800	93.5%	0.138	0.135	0.130	0.128	51	27	10	6	4	98	0.0521	20
		1984	7902	4529	88.2%	0.140	0.130	0.117	0.117	44	23	12	4	2	85	0.0510	24
		1985	8550	4967	96.7%	0.120	0.117	0.102	0.101	39	18	2	2	0	61	0.0486	19
		1986	7861	4977	96.9%	0.109	0.108	0.104	0.104	18	14	6	0	0	38	0.0442	8
		1987	8000	4923	95.9%	0.130	0.126	0.121	0.118	11	13	8	6	3	41	0.0477	9
		1988	6701	4485	87.3%	0.179	0.153	0.151	0.144	70	63	48	19	19	219	0.0563	32
		1989	6374	4585	89.3%	0.130	0.114	0.105	0.104	13	3	6	1	1	24	0.0492	4
		1990	7043	4532	88.2%	0.123	0.118	0.112	0.108	24	11	7	2	1	45	0.0478	10
		1991	7138	3877	75.5%	0.128	0.125	0.125	0.122	39	15	14	6	5	79	0.0502	15
		1992	5808	3314	64.5%	0.108	0.105	0.101	0.101	25	3	4	0	0	32	0.0434	8
		1993	7645	4836	94.2%	0.112	0.104	0.093	0.093	28	9	1	1	0	39	0.0449	11
		1994	8200	4723	92.0%	0.102	0.095	0.093	0.092	7	3	1	0	0	11	0.0475	7

TABLE 3 - 4(Continued)
SUMMARY OF HOURLY OZONE DATA FOR SITES OPERATING DURING 1994

			Hourt	y Data Red	covery*		Hourly M	laximums		Nu	mber of H	lours(In F	PM Rang	ges)	Total	Annual	Days with
			Total	Ozone	Percent	Max.	2nd	3rd	4th	>.081	>.090	>.100	>.110	>.120	Hours	Arithmetic	Hour
Site		Year	Hours	Season	Recovery	Hour	High	High	High	<.091	<.101	<.111	<.121		>.081 ppm	Mean	> .081 ppm
KENNEBEC COU	INTY																
Gardiner	Gardiner H. S.	1980	3299	3299	64.2%	0.143	0.143	0.118	0.117	24	18	9	2	2	55	0.0525	17
		1981	3831	3831	74.6%	0.127	0.122	0.122	0.118	9	12	6	2	3	32	0.0490	9
		1982	4001	4001	77.9%	0.126	0.122	0.119	0.118	22	16	11	5	2	56	0.0498	10
		1983	5023	5023	97.8%	0.145	0.140	0.138	0.138	50	21	13	7	7	98	0.0525	23
		1984	5024	4965	96.7%	0.124	0.112	0.109	0.107	43	35	9	1	1	89	0.0513	20
		1985	4240	4159	81.0%	0.142	0.133	0.130	0.129	43	21	10	6	5	85	0.0539	19
		1986	4298	4216	82.1%	0.111	0.110	0.107	0.104	10	4	3	1	0	18	0.0449	5
		1987	4879	4879	95.0%	0.119	0.112	0.106	0.101	17	5	2	2	0	26	0.0447	7
		1988	4794	4794	93.3%	0.159	0.145	0.145	0.134	63	39	21	13	7	143	0.0528	28
.1		1989	4855	4836	94.2%	0.126	0.118	0.117	0.108	32	8	5	2	1	48	0.0504	10
**		1990	4216	4162	81.0%	0.108	0.107	0.107	0.104	17	13	6	0	0	36	0.0508	11
	Pray Street	1991	4789	4778	93.0%	0.132	0.123	0.120	0.119	27	10	7	4	2	50	0.0487	12
		1992	5112	4860	94.6%	0.115	0.111	0.108	0.104	30	16	4	2	0	52	0.0474	15
		1993	4878	4825	93.9%	0.098	0.096	0.096	0.096	12	10	0	0	0	22	0.0426	7
		1994	5326	4848	94.4%	0.120	0.111	0.099	0.098	18	9	0	2	0	29 [.]	0.0481	9
KNOX COUNTY	l				i												
isle Au Haut	Fire Station	1986	2241	2241	43.6%	0.126	0.107	0.104	0.103	14	7	4	0	1	26	0.0461	7
	!	1987	3113	3113	60.6%	0.154	0.151	0.128	0.127	31	20	10	16	11	88	0.0526	13
	,	1988	2624	2624	51.1%	0.202	0.185	0.185	0.160	60	56	39	46	41	242	0.0670	31
		1989	3053	3053	59.4%	0.118	0.115	0.111	0.109	17	7	9	3	0	36	0.0430	6
		1990	3672	3672	71.5%	0.132	0.131	0.118	0.117	29	20	3 '	2	2	56	0.0506	11
1		1991	3710	3710	72.2%	0.137	0.136	0.135	0.134	49	26	20	18	11	124	0.0553	22
1		1992	4466	4466	87.0%	0.110	0.109	0.108	0.107	52	20	8	0	0	80	0.0483	14
		1993	4629	4629	90.1%	0.115	0.113	0.111	0.108	15	8	8	3	0	34	0.0452	8
		1994	3833	3833	74.6%	0.116	0.115	0.105	0.105	23	5	4	2	0	34	0.0491	8

TABLE 3 - 4(Continued)
SUMMARY OF HOURLY OZONE DATA FOR SITES OPERATING DURING 1994

			Hourt	y Data Red	covery*		Hourty N	laximums		· Nu	mber of H	lours(in F	PM Rang	jes)	Total	Annual	Days with
			Total	Ozone	Percent	Max.	2nd	3rd	4th	>.081	>.090	>.100	>.110	>.120	Hours	Arithmetic	Hour
Site		Year	Hours	Season	Recovery	Hour	High	High	High	<.091	<.101	<.111	<.121		>.081 ppm	Mean	> .081 ppm
Port Clyde	Marshall Point	1987	3308	3308	64.4%	0.149	0.146	0.142	0.140	21	22	14	15	11	83	0.0538	13
İ		1988	4511	4312	84.0%	0.185	0.183	0.167	0.164	75	67	44	20	33	239	0.0622	34
		1989	4146	4146	80.7%	0.134	0.129	0.127	0.125	21	30	7	8	4	70	0.0511	12
		1990	3825	3825	74.5%	0.153	0.149	0.140	0.135	41	28	13	5	6	93	0.0540	16
		1991	4541	4280	83.3%	0.137	0.135	0.134	0.133	53	41	32	23	14 -	163	0.0559	29
		1992	4403	4257	82.9%	0.122	0.118	0.118	0.117	43	39	15	6	1	104	0.0522	16
		1993	4237	4237	82.5%	0.131	0.122	0.116	0.112	18	18	7	5	2	50	0.0486	13
		1994	4360	4053	78.9%	0.124	0.123	0.111	0.107	35	8	2	1	2	48	0.0504	12
OXFORD COUN	JTV																
North Lovell	Route 5	1992	3144	3144	61.2%	0.097	0.094	0.093	0.091	12	4	0	0	0	16	0.0410	4
b core	Noute 5	1993	4051	4051	78.9%	0.083	0.080	0.033	0.031	1	0	0	0	0	10	0.0408	1
ť		1994	4219	4219	82.1%	0.102	0.099	0.073	0.095	3	3	1	0	0	7	0.0449	2
		100 .		.2.0	52.1 76	5.162	0.000	0.001	0.000	Ů	Ū	•	Ū	ŭ	·	0.0410	
PENOBSCOT C	OUNTY																
Holden	Rider Bluff	1993	3195	3195	62.2%	0.104	0.099	0.097	0.095	24	5	1	0	0	30	0.0462	8
		1994	3758	3758	73.2%	0.106	0.101	0.090	0.087	7	0	2	0	0	9	0.0443	3
PISCATAQUIS	COUNTY															:	
Greenville	Mun, Airport	1993	1430	1430	27.8%	0.067	0.063	0.062	0.061	0	0	0	0	o	0	0.0316	o I
	•	1994	5732	5047	98.3%	0.084	0.079	0.076	0.076	1	0	0	0	0	1	0.0391	1
SAGADAHOC (COUNTY						,								,		
Phippsburg	Navy Road	1993	2529	2529	49.2%	0.132	0.126	0.125	0.122	29	30	6	4	4	73	0.0532	16
Triippsburg	Mavy Noau	1994	4069	4069	79.2%	0.132	0.128	0.123	0.122	58	21	5	2	3	73 89	0.0552	18
		1554	4009	4009	19.270	0.140	0.120	0.124	0.112	36	21	3	2	3	03	0.0301	10

TABLE 3 - 4(Continued)
SUMMARY OF HOURLY OZONE DATA FOR SITES OPERATING DURING 1994

			Hourl	y Data Rec	covery*		Hourly M	laximums		Nu	mber of H	ours(in P	PM Rang	ges)	Total	Annual	Days with
			Total	Ozone	Percent	Max.	2nd	3rd	4th	>.081	>.090	>.100	>.110	>.120	Hours	Arithmetic	Hour
Site		Year	Hours	Season	Recovery	Hour	High	High	High	<.091	<.101	<.111	<.121		>.081 ppm	Mean	> .081 ppm
SOMERSET COU	INTY															· · · · · · · · · · · · · · · · · · ·	
Skowhegan	Somerset Mill	1991	4828	4828	94.0%	0.116	0.112	0.106	0.105	6	1	2	2	0	11	0.0420	3
		1992	4970	4970	96.8%	0.096	0.090	0.090	0.090	9	1	0	0	0	10	0.0406	2
		1993	4901	4901	95.4%	0.099	0.098	0.095	0.094	7	8	0	0	0	15	0.0379	4
		1994	4653	4653	90.6%	0.096	0.095	0.088	0.088	9	2	0	0	0	11	0.0433	5
WASHINGTON C	OUNTY					¥I											
Jonesport	Public Landing	1989	2879	2879	56.1%	0.100	0.099	0.093	0.092	13	6	0	0	0	19	0.0431	6
		1990	4172	4172	81.2%	0.106	0.106	0.105	0.103	12	2	4	0	0	18	0.0400	3
		1991	4373	4291	83.5%	0.120	0.117	0.114	0.111	31	26	9	4	0	70	0.0452	14
		1992	4267	4119	80.2%	0.104	0.103	0.101	0.098	28	7	3	0	0	38	0.0447	8
#		1993	4820	4762	92.7%	0.105	0.104	0.103	0.098	10	6	3	9	0	19	0.0395	3
		1994	4427	4427	86.2%	0.104	0.098	0.098	0.092	10	4	1	0	0	15	0.0482	6
YORK COUNTY																	
Kennebunkport	Parson's Way	1983	3873	3873	75.4%	0.149	0.148	0.143	0.137	50	43	28	13	18	152	0.0554	29
		1984	4006	4006	78.0%	0.149	0.147	0.145	0.140	68	47	20	11	34	180	0.0601	34
		1985	3992	3931	76.5%	0.170	0.168	0.166	0.165	74	51	20	18	27	190	0.0639	38
		1986	4089	4089	79.6%	0.142	0.138	0.132	0.126	22	21	11	4	5	63	0.0524	14
		1987	4168	4168	81.2%	0.152	0.145	0.142	0.142	19	14	15	6	14	68	0.0511	12
		1988	3898	3898	75.9%	0.177	0.168	0.166	0.154	53	59	39	39	41	231	0.0650	38
		1989	3784	3784	73.7%	0.154	0.147	0.145	0.140	36	21	23	10	14	104	0.0576	17
		1990	4067	4067	79.2%	0.162	0.162	0.160	0.152	37	30	17	12	16	112	0.0570	23
		1991	4074	4074	79.3%	0.158	0.150	0.148	0.143	62	21	17	8	17	125	0.0582	27
		1992	4180	4180	81.4%	0.133	0.127	0.124	0.122	54	31	16	7	4	112	0.0536	21
		1993	3822	3822	74.4%	0.134	0.127	0.125	0.121	49	36	19	5	4	113	0.0537	21
		1994	3820	3820	74.4%	0.141	0.125	0.122	0.116	44	22	12	2	3	83	0.0560	20

^{*} Total Hours is the total number of valid hours of data collected during the calendar year. Ozone season is the number of hours of valid data collected during the ozone season which runs from April 1 to October 31. Percent recovery is the percent of hours during the ozone season in which valid data was collected.

TABLE 3 - 5
FEDERAL OZONE EXCEEDANCES IN MAINE LISTED BY COUNTY AND SITE

		Percent		Daily Hourly	y Maximums		Excee	dances	3 Year Ave.	Compliance
		Data	High	Second	Third	Fourth	Meas.	Est.	of Estimated	With Fed.
Site	Year	Recovery	Day	High	High	High	>.12 ppm	>.12 ppm	Exceedances	Standard*
CUMBERLAND COUNTY										
Cape Elizabeth Shelter Site	1980	66.4%	0.190	0.178	0.149	0.145	7	10.4	3.47	No
	1981	76.2%	0.142	0.138	0.136	0.134	5	6.5	5.63	No
	1982	80.8%	0.142	0.137	0.131	0.127	5	6.2	7.70	No
	1983	98.6%	0.172	0.152	0.152	0.133	9	9.1	7.27	No
	1984	93.5%	0.171	0.147	0.140	0.137	6	6.3	7.20	No
•	1985	77.6%	0.167	0.158	0.144	0.138	4	5.1	6.83	No
	1986	98.1%	0.131	0.119	0.112	0.107	1	1.0	4.13	No
	1987	99.5%	0.156	0.141	0.138	0.136	4	4.0	3.37	No
	1988	97.7%	0.178	0.168	0.166	0.150	11	11.2	5.40	No
	1989	94.9%	0.146	0.130	0.125	0.113	3	3.2	6.13	No
1	1990	94.9%	0.148	0.125	0.123	0.109	2	2.1	5.50	No
	1991	98.6%	0.145	0.141	0.137	0.127	4	4.0	3.10	No
	1992	98.6%	0.128	0.118	0.110	0.109	1	1.0	2.37	No
	1993	98.1%	0.122	0.112	0.103	0.103	0	0.0	1.67	No
·	1994	100.0%	0.148	0.122	0.102	0.099	1	1.0	0.67	Yes
HANCOCK COUNTY										
Bar Harbor Acadia Nat. Pk	1982	12.1%	0.055	0.055	0.050	0.040	0	0.0	0.00	?
	1983	93.5%	0.138	0.135	0.128	0.113	3	3.2	1.07	No
	1984	87.9%	0.140	0.117	0.108	0.107	1	1.1	1.43	No
	1985	97.7%	0.120	0.117	0.102	0.100	0	0.0	1.43	No
	1986	95.8%	0.109	0.104	0.101	0.100	0	0.0	0.37	Yes
	1987	95.8%	0.130	0.121	0.117	0.112	1	1.0	0.33	Yes
	1988	91.6%	0.179	0.153	0.135	0.133	6	6.5	2.50	No
	1989	94.4%	0.130	0.104	0.104	0.088	1	1.0	2.83	No
1	1990	95.8%	0.123	0.112	0.105	0.096	0	0.0	2.50	No
	1991	75.7%	0.128	0.125	0.111	0.109	2	2.5	1.17	No
1	1992	63.6%	0.108	0.095	0.093	0.088	0	0.0	0.83	Yes ·
	1993	99.1%	0.112	0.094	0.093	0.093	0	0.0	0.83	Yes
	1994	90.2%	0.102	0.092	0.088	0.087	0	0.0	0.00	Yes

TABLE 3 - 5(Continued)
FEDERAL OZONE EXCEEDANCES IN MAINE LISTED BY COUNTY AND SITE

		1	Percent		Daily Hourly	/ Maximums		Excee	dances	3 Year Ave.	Compliance
			Data	High	Second	Third	Fourth	Meas.	Est.	of Estimated	With Fed.
Site		Year	Recovery	Day	High	High	High	>.12 ppm	>.12 ppm	Exceedances	Standard*
KENNEBEC COL	INTY										
Gardiner	Gardiner H. S.	1980	65.0%	0.143	0.110	0.107	0.105	1	1.5	0.50	7
		1981	74.3%	0.127	0.122	0.118	0.108	li	1.3	0.93	7
		1982	77.6%	0.126	0.122	0.112	0.106	1	1.3	1.37	No
		1983	99.1%	0.145	0.140	0.138	0.118	3	3.0	1.87	No
		1984	97.2%	0.124	0.112	0.107	0.107	O	0.0	1.43	No
		1985	80.8%	0.142	0.129	0.125	0.114	3	3.7	2.23	No
		1986	82.7%	0.111	0.110	0.100	0.087	0	0.0	1.23	No
		1987	95.8%	0.119	0.093	0.092	0.087	0	0.0	1.23	No
1		1988	94.9%	0.159	0.134	0.125	0.119	3	3.1	1.03	No
		1989	99.1%	0.126	0.108	0.100	0.098	1	1.0	1.37	No
İ		1990	85.5%	0.108	0.107	0.102	0.097	0	0.0	1.37	No
	Pray Street	1991	98.6%	0.132	0.111	0.106	0.102	1	1.0	0.67	Yes
	·	1992	100.0%	0.115	0.104	0.103	0.096	0	0.0	0.33	Yes
		1993	99.5%	0.098	0.096	0.096	0.095	0	0.0	0.33	Yes
		1994	98.6%	0.120	0.098	0.094	0.093	0	0.0	0.00	Yes
KNOX COUNTY											
Isle Au Haut	Fire Station	1986	42.1%	0.126	0.107	0.104	0.091	1	2.3	0.77	?
		1987	60.7%	0.154	0.128	0.127	0.126	4	6.5	2.93	No
		1988	50.9%	0.202	0.158	0.147	0.142	8	15.6	8.13	No
		1989	59.3%	0.118	0.108	0.108	0.107	0	0.0	7.37	No
		1990	70.6%	0.132	0.102	0.100	0.096	1	1.4	5.67	No
		1991	70.6%	0.137	0.136	0.134	0.129	5	7.0	2.80	No
		1992	87.9%	0.110	0.106	0.099	0.093	0	0.0	2.80	No
		1993	87.9%	0.115	0.111	0.108	0.094	0	0.0	2.33	No
		1994	75.7%	0.116	0.115	0.104	0.091	0	0.0	0.00	Yes
Port Clyde	Marshall Point	1987	64.5%	0.149	0.142	[,] 0.129	0.120	3	4.7	1.57	No
1 '		1988	84.1%	0.185	0.149	0.143	0.141	9	10.7	5.13	No
		1989	85.0%	0.134	0.120	0.120	0.119	1	1.2	5.53	No
		1990	72.9%	0.153	0.121	0.118	0.116	1	1.3	4.40	No
		1991	87.9%	0.137	0.135	0.129	0.128	4	4.5	2.33	No
l		1992	87.4%	0.122	0.118	0.108	0.106	0	0.0	1.93	No
		1993	86.9%	0.131	0.122	0.112	0.101	1	1.2	1.90	No
		1994	82.2%	0.124	0.111	0.103	0.091	0	0.0	0.40	Yes

TABLE 3 - 5(Continued)
FEDERAL OZONE EXCEEDANCES IN MAINE LISTED BY COUNTY AND SITE

Site Ye OXFORD North Lovell Route 5 199 199 PENOBSCOT Holden Rider Bluff 199 PISCATAQUIS Greenville Mun. Airport 199 SAGADAHOC Phippsburg Navy Road 199 SOMERSET Skowhegan Somerset Mill 199 199 199	2 61.7% 3 79.4% 4 83.2%	High Day 0.097 0.083 0.102	Second High 0.087 0.080 0.097	Third High	Fourth High 0.082	Meas. >.12 ppm	Est. >.12 ppm	3 Year Ave. of Estimated Exceedances	Compliance With Fed. Standard*
OXFORD North Lovell Route 5 199 199 199 PENOBSCOT Holden Rider Bluff 199 199 PISCATAQUIS Greenville Mun. Airport 199 199 SAGADAHOC Phippsburg Navy Road 199 199 SOMERSET Skowhegan Somerset Mill 199 199	2 61.7% 3 79.4% 4 83.2%	0.097 0.083	0.087 0.080	0.083				Exceedances	
North Lovell Route 5 199 199 199 199 PENOBSCOT Holden Rider Bluff 199 199 PISCATAQUIS Greenville Mun. Airport 199 199 SAGADAHOC Phippsburg Navy Road 199 199 SOMERSET Skowhegan Somerset Mill 199 199	3 79.4% 4 83.2%	0.083	0.080						
PENOBSCOT Holden Rider Bluff 198 198 PISCATAQUIS Greenville Mun. Airport 198 198 SAGADAHOC Phippsburg Navy Road 198 198 SOMERSET Skowhegan Somerset Mill 198 198	3 79.4% 4 83.2%	0.083	0.080		0.082	_			
PENOBSCOT Holden Rider Bluff 199 199 PISCATAQUIS Greenville Mun. Airport 199 199 SAGADAHOC Phippsburg Navy Road 199 199 SOMERSET Skowhegan Somerset Mill 199 199	4 83.2%			0.070	0.002	0	0.0	0.00	?
PENOBSCOT Holden Rider Bluff 198 198 PISCATAQUIS Greenville Mun. Airport 198 198 SAGADAHOC Phippsburg Navy Road 198 198 SOMERSET Skowhegan Somerset Mill 198 198		0.102	0.007	0.079	0.071	0	0.0	0.00	7
Holden Rider Bluff 198 198 PISCATAQUIS Greenville Mun. Airport 198 198 SAGADAHOC Phippsburg Navy Road 198 198 SOMERSET Skowhegan Somerset Mill 198 199			0.031	0.079	0.077	0	0.0	0.00	Yes
PISCATAQUIS Greenville Mun. Airport 199 199 SAGADAHOC Phippsburg Navy Road 199 199 SOMERSET Skowhegan Somerset Mill 199 199		Í							
PISCATAQUIS Greenville Mun. Airport 198 198 SAGADAHOC Phippsburg Navy Road 198 198 SOMERSET Skowhegan Somerset Mill 198 199	3 62.1%	0.104	0.097	0.095	0.088	o	0.0	0.00	?
Greenville Mun. Airport 198 198 SAGADAHOC Phippsburg Navy Road 198 198 SOMERSET Skowhegan Somerset Mill 198 199	4 72.9%	0.106	0.083	0.082	0.081	Ō	0.0	0.00	7
Greenville Mun. Airport 198 198 SAGADAHOC Phippsburg Navy Road 198 198 SOMERSET Skowhegan Somerset Mill 198 199									
SAGADAHOC Phippsburg Navy Road 199 199 SOMERSET Skowhegan Somerset Mill 199 199	3 28.0%	0,067	0.054	0.053	0.050	0 -	0.0	0.00	7
SAGADAHOC Phippsburg Navy Road 199 199 SOMERSET Skowhegan Somerset Mill 199 199		0.084	0.076	0.072	0.066	ŏ	0.0	0.00	7
Phippsburg Navy Road 199 199 SOMERSET Skowhegan Somerset Mill 199 199	33.1%	0.004	0.070	0.012	0.000		0.0	0.00	
SOMERSET Skowhegan Somerset Mill 198 199 199							I		
SOMERSET Skowhegan Somerset Mill 199	3 52.3%	0.132	0.125	0.104	0.102	2	3.8	1.27	No
Skowhegan Somerset Mill 199 199 199	4 83.6%	0.148	0.124	0.111	0.106	1	1.2	1.67	No
199 199									
199	1 95.3%	0,116	0.085	0.083	0.081	0	0.0	0.00	?
	2 98.1%	0.096	0.090	0.081	0.079	0	0.0	0.00	?
199	3 97.7%	0.099	0.094	0.093	0.091	0	0.0	0.00	Yes
,	4 91.6%	0,096	0.088	0.088	0.086	0	0.0	0.00	Yes
WASHINGTON							1		1
Jonesport Public Landing 198	9 55.6%	0.100	0.093	0.092	0.092	0	0.0	0.00	7
199		0,106	0.106	0.088	0.032	ŏ	0.0	0.00	7
199		0.120	0.114	0.104	0.103	ŏ	0.0	0.00	Yes
199		0.104	0.098	0.097	0.094	Ö	0.0	0.00	Yes
, 199		0.105	0.094	0.089	0.079	ő	0.0	0.00	Yes
199		0.104	0.092	0.089	0.088	ŏ	0.0	0.00	Yes

TABLE 3 - 5(Continued)
FEDERAL OZONE EXCEEDANCES IN MAINE LISTED BY COUNTY AND SITE

			Percent		Daily Hourly	Maximums		Excee	dances	3 Year Ave.	Compliance
			Data	High	Second	Third	Fourth	Meas.	Est.	of Estimated	With Fed.
Site		Year	Recovery	Day	High	High	High	>.12 ppm	>.12 ppm	_Exceedances	Standard*
YORK COUNTY											
Kennebunkport	Parson's Way	1983	75.7%	0.149	0.143	0.137	0.135	7	9.2	3.07	No
		1984	78.5%	0.149	0.147	0.145	0.140	11	14.0	7.73	No
		1985	76.2%	0.170	0.165	0.152	0.145	4	5.2	9.47	No
		1986	80.4%	0.142	0.126	0.117	0.115	2	2.5	7.23	No
		1987	81.8%	0.152	0.142	0.135	0.131	4	4.9	4.20	No
		1988	74.8%	0.177	0.154	0.152	0.152	13	17.1	8.17	No
		1989	74.3%	0.154	0.147	0.140	0.122	3	4.0	8.67	No
		1990	79.0%	0.162	0.152	0.144	0.142	5	6.3	9.13	No
Į		1991	83.2%	0.158	0.148	0.141	0.126	4	4.8	5.03	No
		1992	85.5%	0.133	0.127	0.118	0.109	2	2.3	4.47	No
		1993	78.5%	0.134	0.125	0.117	0.116	2	2.5	3.20	No
i		1994	78.5%	0.141	0.116	0.104	0.103	1	1.3	2.03	No

^{*} Based on the federal ozone standard of .12ppm. The standard is attained when the expected number of days per calendar year with maximum hourly average concentrations above .12 part per million is equal to or less than 1, as determined by Part 50 Appendix H. Appendix H says that this is a 3 year average of exceedances or if the data is not complete it is a 3 year average of the estimated number of exceedances.

TABLE 3-6
YEARLY STATE OZONE STANDARD EXCEEDANCE DAYS COMPARISON*
STATE OF MAINE

								YE	AR							
MONTH	<u>1980</u>	<u>1981</u>	<u>1982</u>	<u>1983</u>	<u>1984</u>	<u>1985</u>	<u>1986</u>	<u>1987</u>	<u>1988</u>	<u>1989</u>	<u>1990</u>	<u>1991</u>	<u>1992</u>	<u>1993</u>	<u>1994</u>	<u>AVERAGE</u>
APRIL	1	0	5	1	1	0	0	0	0	0	1	1	0	0	0	0.67
MAY	3	4	5	2	3	6	2	3	6	2	1	5	6	1	2	3.40
JUNE	10	4	2	9	11	9	7	7	12	4	8	7	8	6	2	7.07
JULY	15	4	12	15	16	19	6	5	18	6	8	12	4	7	16	10.87
AUGUST	7	9	7	9	11	10	3	8	12	8	6	11	7	8	9	8.33
SEPTEMBER	2	1	2	12	5	6	2	3	3	6	4	2	4	3	1	3.73
OCTOBER	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0.07
TOTALS	38	22	33	48	47	50	20	26	51	26	29	38	29	25	30	34.13
# OF SITES	7	6	8	6	6	8	9	10	9	9	9	11	14	13	12	

TABLE 3-7
YEARLY FEDERAL OZONE STANDARD EXCEEDANCE DAYS COMPARISON*
STATE OF MAINE

								YE	AR							
<u>MONTH</u>	<u>1980</u>	<u>1981</u>	<u>1982</u>	<u>1983</u>	<u>1984</u>	<u>1985</u>	<u>1986</u>	<u>1987</u>	<u>1988</u>	<u>1989</u>	<u>1990</u>	<u>1991</u>	<u>1992</u>	<u>1993</u>	<u>1994</u>	<u>AVERAGE</u>
APRIL	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0.00
MAY	0	3	0	0	0	1	0	0	1	0	0	0	1	0	0	0.40
JUNE	1	1	0	1	2	0	0	1	5	0	1	3	0	0	0	1.00
JULY	4	0	4	3	6,	2	1	1	6	3	1	3	0	3	1	2.53
AUGUST	2	2	0	3	4	3	1	3	7	0	3	1	1	1	0	2.07
SEPTEMBER	0	0	1	3	0	0	0	0	0	1	0	0	0	0	0	0.33
OCTOBER	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0.00
TOTALS	7	6	5	10	12	6	2	5	19	4	5	7	2	4	1	6.33
# OF SITES	7	6	8	6	6	8	9	10	9	9	9	11	14	13	12	

^{*} Separate days on which either the federal or state standard was exceeded.

4. NITROGEN DIOXIDE (NO2)

4.1 Description and Sources

In its pure state, nitrogen dioxide is a reddish-orange-brown gas with a characteristic pungent odor. It is corrosive and a strong oxidizing agent. Nitrogen dioxide comprises about 10% of the oxides of nitrogen (NOx) that are formed when nitrogen in the air combines with oxygen during high temperature combustion. Most of the rest of the NOx emitted by combustion sources is nitric oxide (NO). However, during the day most of the NO is photochemically transformed into NO₂. Thus, essentially all the NOx emitted can be assumed to eventually become NO₂.

4.2 Health and Welfare Effects

Exposure to NO₂ affects the delicate structure of lung tissue. High levels cause lung irritation and potential lung damage. Lower levels have been associated with increased respiratory disease. Oxides of nitrogen can cause serious injury to vegetation, including bleaching or death of plant tissue, loss of leaves, and reduced growth rate. NOx also deteriorates fabrics and fades fabric dyes. Nitrate salts formed from nitrogen oxides have been associated with the corrosion of metals. Nitrogen oxides can also reduce visibility.

4.3 Standards

The current standard for NO₂ is an annual arithmetic mean (average) value not to exceed .05 ppm. NO₂ is the only gaseous pollutant for which only a long-term (annual average) standard has been established.

4.4 Monitoring

Nitrogen Dioxide was monitored at one site in Maine during 1994 using continuous monitoring equipment. Table 4-1 presents the data collected during 1994.

TABLE 4 - 1 1994 NITROGEN DIOXIDE DATA SUMMARY (Parts Per Million)

SITE	ADDRESS	<u>OBSERVATIONS</u>	ARITHMETIC MEAN
CUMBERLAND Cape Elizabeth		4551	0.002*

^{*} Insufficient data collected for a valid annual arithmetic mean.

5. SULFUR DIOXIDE (SO2)

5.1 Description and Sources

Sulfur dioxide is a colorless irritating gas having the same pungent odor as a struck match. Most people can detect its taste at a level of about 0.3 to 1 part per million. SO₂ is highly soluble in water, forming sulfurous acid. On a worldwide basis, SO₂ is considered to be one of the major pollution problems. It is emitted mainly from stationary sources that utilize fossil fuels (coal, oil) such as power plants, ore smelters, and refineries.

5.2 Health and Welfare Effects

The health effects of sulfur dioxide appear to be always associated with high levels of particulates or other pollutants. The world's major recorded air pollution disasters have been associated with high levels of sulfur dioxide and particulates. The excess deaths attributed to these pollutants were due to respiratory failures and occurred predominantly, but not exclusively, in the elderly and infirm. Atmospheres containing high levels of sulfur dioxide are associated with elevated concentrations of other sulfur compounds such as sulfates and sulfuric acid mists, which are corrosive and potentially carcinogenic.

The corrosiveness of SO₂ and its derivatives also causes crop and material damage. Its transport and transformation into sulfurous and sulfuric acids contribute to acid precipitation, causing soils and lakes to become seriously acidified.

5.3 Standards

There are two existing Primary National Ambient Air Quality Standards for sulfur dioxide. The first is a long-term one year arithmetic average of 0.03 parts per million (ppm). The second is a short-term 24-hour average standard where concentrations are not to exceed 0.14 ppm more than once per year. The current Secondary NAAQS for SO₂ is a 3-hour average concentration of 0.5 ppm not to be exceeded more than once per year.

In addition there are three State standards for sulfur dioxide. The first is a long-term one-year arithmetic average of .022 parts per million. The second was a short-term 24-hour average standard of .088 ppm not to be exceeded. The third was a short-term 3-hour average concentration of .439 ppm not to be exceeded. During 1987 both of the short-term standards were amended to allow for one exceedance per year.

5.4 Monitoring

Sulfur dioxide was monitored at fifteen sites in Maine during 1994 using continuous monitoring equipment utilizing either the pulsed fluorescent or coulometric methods.

Table 5-1 is the 1994 Data Summary for SO₂. Tables 5-2 and 5-3 present the SO₂ Historical

Comparison Data. Table 5-3 in past years had indicated violations but because one exceedance was allowed per year beginning in 1987 this table now indicates exceedances of the standards rather than violations to maintain continuity for comparisons.

TABLE 5 - 1
1994 SULFUR DIOXIDE DATA SUMMARY
(Parts Per Million)

	SITE	ADDRESS	NUMBER OF OBSERVATIONS	HIGHEST 3-HOUR AVE.	SECOND HIGHEST 3-HOUR AVE.	HIGHEST 24-HOUR AVE.	SECOND HIGHEST 24-HOUR AVE.	ANNUAL ARITH. MEAN
	ANDROSCOGG	IN COUNTY						
	Lewiston	Country Kitchen Parking Lot	8155	0.058	0.056	0.029	0.027	0.006
	Livermore Falls	10-12 Millett Street	6926	0.054	0.052	0.033	0.032	0.007
	Lewiston	Birch Street	1573	0.060	0.056	0.030	0.026	.009*
	AROOSTOOK C	COUNTY						
	Madawaska	Albert Street	8319	0.121	0.119	0.073	0.042	0.008
	Madawaska	U. S. Post Office	8314	0.116	0.108	0.060	0.048	0.009
	Madawaska	Madawaska High School	8293	0.167	0.079	0.050	0.032	0.004
	Presque Isle	Riverside Street	2449	0.015	0.013	800.0	0.008	0.003
1	CUMBERLAND C	COUNTY						
	Portland	Shelter Site	8310	0.078	0.076	0.045	0.043	0.008
	KENNEBEC COL	JNTY		-				
	Waterville	Front Street	60	0.027	0.019	0.014	0.007	0.009
	OXFORD COUN	ITY						
	Mexico	Hunt's Property	8206	0.043	0.039	0.020	0.020	0.008
	Rumford	Taylor Mountain 1	7551	0.048	0.044	0.019	0.016	0.006
	Rumford	Taylor Mountain 2	7576	0.033	0.033	0.016	0.015	0.006
	Rumford	Village Green Site	8152	0.035	0.033	0.020	0.017	0.005
	PENOBSCOT CO	OUNTY						
	Lincoln	Thomas Motel Trailer Park	673	0.020	0.020	0.008	0.006	.002*
	Millinocket	York Street	8657	0.063	0.063	0.031	0.031	0.004

^{*} Insufficient data for a valid annual arithmetic mean.

TABLE 5 - 2
SULFUR DIOXIDE HISTORICAL COMPARISONS
(Maximum 24 - Hour Concentrations of Sulfur Dioxide)

		OUR CONC	ENTRATIO	N(PPM)				
SITE	<u>ADDRESS</u>	<u>1988</u>	<u>1989</u>	<u>1990</u>	<u> 1991</u>	<u> 1992</u>	<u>1993</u>	<u> 1994</u>
ANDROSCOGO	SIN COUNTY							
Lewiston	Country Kitchen Parking Lot	0.053	0.042	0.027	0.026	0.021	0.027	0.029
AROOSTOOK (COUNTY							
Madawaska	Albert Street	0.071	0.048	0.093	0.072	0.080	0.044	0.073
Madawaska	U. S. Post Office	0.073	0.069	0.042	0.048	0.088	0.070	0.060
Madawaska	Madawaska High School	0.057	0.032	0.027	0.045	0.040	0.045	0.050
CUMBERLAND	COUNTY							
Portland	Shelter Site	0.047	0.044	0.034	0.039	0.032	0.033	0.045
KENNEBEC CO	UNTY							
Waterville	Front Street	N/A	N/A	0.029	0.042	0.038	0.038	0.014
OXFORD COU	NTY							
Mexico	Hunt's Property	0.067	0.064	0.054	0.020	0.018	0.022	0.020
Rumford	Taylor Mountain 1	0.125	0.044	0.066	0.022	0.021	0.026	0.019
Rumford	Taylor Mountain 2	0.074	0.053	0.063	0.027	0.024	0.021	0.016
Rumford	Village Green Site	0.061	0.049	0.046	0.033	0.021	0.020	0.020
PENOBSCOT C	OUNTY							
Lincoln	Thomas Motel Trailer Park	0.036	0.041	0.059	0.042	0.029	0.023	0.008
Millinocket	York Street	0.038	0.044	0.102	0.035	0.024	0.027	0.031

TABLE 5 - 3
SULFUR DIOXIDE HISTORICAL COMPARISONS
(Sites with exceedances of the standards in the past seven years)

TOTAL NUMBER OF EXCEEDANCES* SITES ADDRESS <u> 1988</u> <u> 1989</u> <u>1990</u> <u> 1991</u> 1992 <u> 1993</u> 1994 **OXFORD COUNTY** 0 Rumford Taylor Mountain 1 0 0 0 0 1 0 PENOBSCOT COUNTY Millinocket York Street 0 0 0 0 0 0

^{*} Includes 3-Hour and 24-Hour Exceedances.

6. PARTICULATES (TSP and PM10)

6.1 Description and Sources

Particulates is the term given to the tiny particles of solid or semi-solid material found in the atmosphere. It is this "dirt" in the air that is visible as a "Brown Cloud", haze or smog. The sources of particulates are many: wind-blown dust and sand from roadways, fields, and construction; coal dust, fly ash, and carbon black from various combustion sources; and automobile exhaust, to name a few. Particulates that range in size from less than 0.1 micrometer up to approximately 45 micrometers are called "total suspended particulates." Particles larger than that range tend to settle out of the air and not remain suspended, except in high winds.

6.2 Health and Welfare Effects

The human nose filters out 99 percent of the large and medium-sized particles. The rest enter the windpipe and lungs, where some, known as inhalable particulates, cling to protective mucous and are removed. Some of the smallest, called respirable particulates, are deposited in the lungs' tiny air sacs (alveoli).

In the lungs particulates slow down the exchange of oxygen with carbon dioxide in the blood, causing shortness of breath. The heart may be strained because it must work harder to compensate for oxygen loss. Usually the people most sensitive to these conditions have respiratory diseases like emphysema, bronchitis, asthma, or heart problems. The elderly and children are also sensitive.

Particles themselves may be poisonous if inhaled or absorbed, damaging remote organs like the kidneys or liver. Swallowed mucous that is laden with poisonous particulate matter may damage the stomach.

In addition, particulates may be carriers of poisonous liquid or gaseous substances. Sulfur dioxide, a major air pollutant in its own right, is frequently absorbed by particulates and can react with them to form sulfates. Sulfates react with moisture in the air or in the respiratory tract to form a corrosive liquid (sulfuric acid) that irritates delicate membranes and slows down the cleansing action of mucous. This effect can reduce the body's ability to remove harmful bacteria, increasing the possibility of infection.

Adverse health effects from particulate matter aren't always seen immediately. Particulates can accumulate in the lungs after repeated, long-term exposure, causing respiratory distress and other health problems that may be manifested later.

Particles in the air block out and scatter sunlight, reducing visibility. Particulates soil and corrode metals, masonry, and textiles. Irritating odors are often associated with particulates, also.

6.3 Standards

Primary:

At the beginning of 1987 the primary particulate standards were for total suspended particulates (TSP), independent of particle size or chemical composition. The long-term standard was an annual geometric mean not to exceed 75 micrograms of particulates per cubic meter of air (ug/m³). The short-term standard was a 24-hour average of 260 ug/m³ not to be exceeded more than once per year.

In July of 1987 EPA published revised particulate standards to account for the deeper inhalability of small particles and eliminated the total suspended particulate standards. The new standards, rather than applying to TSP, apply to inhalable or fine particulates. A particle size of 10 micrometers was selected as the upper size limit with a 24-hour concentration of 150 ug/m³ and an annual standard of 50 ug/m³ expressed as an expected annual arithmetic mean (AAM). The short term standard is attained when the expected number of exceedances is no more than one per year. The expected AAM is determined by averaging the annual arithmetic averages from three successive years of data.

Secondary:

The secondary TSP standard was a 24-hour average of 150 ug/m³ not to be exceeded more than once per year, designed to protect from soiling, corrosion, etc.

When EPA adopted the fine particulate standards they eliminated the secondary TSP standards and made the secondary fine particulate standards equal to the primary fine particulate standards.

State Standards:

As of the end of 1988 the State Standards for total suspended particulates still included an annual geometric mean of 60 micrograms per cubic meter and a 24-hour standard of 150 micrograms per cubic meter not to be exceeded. In addition, the Board of Environmental Protection adopted the Federal fine particulate standards for both the short term twenty-four hour and the annual arithmetic mean.

In 1989 the State Legislature passed a more restrictive annual standard for fine particulates of 40 ug/m³. In addition, the TSP annual State standard was eliminated and the 24 hour standard was changed to be an indicator of a nuisance condition.

6.4 Monitoring

Total Suspended Particulates were monitored at five sites in Maine during 1994 using High-Volume Particulate Air Samplers (Hi-Vols).

Hi-Vols operate on the same principle as a vacuum cleaner in that the air is drawn through a filter

to "catch the dust". The difference is that a Hi-Vol draws a calibrated volume of air through a preweighed filter pad (rather than a bag) for a twenty-four hour period. The change in weight of the filter pad is recorded as total suspended particulate or TSP in micrograms of particulates per cubic meter of air.

Table 6-1 is a summary of the TSP data collected in Maine during 1994. Table 6-2 is a historical comparison of the TSP Annual Geometric Means at sites which have been in existence over the last two years. Table 6-3 summarizes the number of exceedances of the TSP nuisance standard which have occurred over the last seven years and the sites at which they occurred.

Fine particulates were monitored at thirty-four sites during 1994 using PM10 samplers. The sampling is conducted with size-selective inlets and flow controlling devices designed to meet EPA's monitor specifications.

Table 6-4 is a summary of the fine particulate data collected in Maine during 1994. Tables 6-5 and 6-6 provide some historical comparison data over the last few years these monitors have been in operation.

TABLE 6 - 1
1994 TOTAL SUSPENDED PARTICULATES DATA SUMMARY
(Micrograms Per Cubic Meter)

SITE	ADDRESS	NUMBER OF OBSERVATIONS	HIGHEST 24-HOUR	SECOND HIGHEST	THIRD HIGHEST	ANNUAL GEOMETRIC <u>MEAN</u>
KENNEBEC	COUNTY					
Winslow	Gulley Hill Road	1 <i>7</i> 5	157	110	108	36.5
Winslow	Boston Avenue	177	98	93	86	29.0
KNOX COU	INTY					
Thomaston	Mitchell Property	120	96	90	83	21.2
PENOBSCO	T COUNTY					
Lincoln	Thomas Motel Trailer Park	13	77	64	42	33.2 *
Lincoln	Lincoln Post Office Building	5	38	36	32	29.1 *

^{*} Insufficient data collected for valid annual geometric mean.

TABLE 6 - 2
TOTAL SUSPENDED PARTICULATES HISTORICAL COMPARISON
ANNUAL GEOMETRIC MEANS (UG/M3)

			AN	INUAL GE	OMETRIC N	MEANS(UG/	M3)	
SITE	ADDRESS	<u>1988</u>	<u>1989</u>	<u>1990</u>	<u>1991</u>	<u>1992</u>	1993	<u>1994</u>
KENNEBEC	COUNTY							
Winslow	Gulley Hill Road	44.1	51.9 *	39.9	42.0	40.5	40.4	36.5
Winslow	Boston Avenue	N/A	N/A	33.3	32.7	35.2	30.4	29.0
KNOX COU	INTY					*		
Thomaston	Mitchell Property	24.5	25.1	21.3	20.5	21.7	21.0	21.2
PENOBSCO	OT COUNTY							
Lincoln	Thomas Motel Trailer Park	34.1	33.9	32.8	37.9	32.9	29.4	33.2 *
Lincoln	Lincoln Post Office Building	32.3	35.2	39.0	41.0	41.1	36.3	29.1 *

^{*} Insufficient data collected for valid annual geometric mean.

TABLE 6 - 3
TOTAL SUSPENDED PARTICULATES HISTORICAL COMPARISON
(Sites with samples greater than 150 ug/m3)

NUMBER OF SAMPLES GREATER THAN 150 UG/M3											
SITE	<u>ADDRESS</u>	<u>1988</u>	<u> 1989</u>	<u>1990</u>	<u> 1991</u>	<u> 1992</u>	<u> 1993</u>	<u> 1994</u>			
KENNEBEC C	OUNTY										
Winslow	Gulley Hill Road	1	6	1	1	3	6	1			
Winslow	Boston Avenue	N/A	N/A	N/A	0	1	2	0			
KNOX COUN	ITY										
Thomaston	Mitchell Property	3	0	0	0	0	0	0			
PENOBSCOT	COUNTY										
Lincoln	Lincoln Post Office Building	0	2	3	3	4	1	0			
Lincoln	Thomas Motel Trailer Park	2	4	0	2	2	0	0			

TABLE 6 - 4
1994 FINE PARTICULATE DATA SUMMARY
(Micrograms Per Cubic Meter)

	SITE	ADDRESS	NUMBER OF OBSERVATIONS	HIGHEST 24-HOUR	SECOND HIGHEST	THIRD HIGHEST	ANNUAL ARITH. MEAN	ANNUAL GEOM. <u>MEAN</u>
	ANDROSCOG	GIN COUNTY						
	Lewiston Lewiston	Country Kitchen Parking Lot Birch Street	57 9	56 40	46 39	46 32	20.2 20.8 *	17.5 16.5 *
	AROOSTOOK	COUNTY						
	Madawaska	Big Daddy's Restaurant	59	54	46	46	25.0	23.5
	Presque Isle	Northeastland Hotel(Continuous)	359	87	70	63	23.0	16.6
	Presque Isle	Regional Office	104	43	34	31	13.5	12.0
	Presque Isle	Riverside Street	117	56	52	48	20.3	17.8
	CUMBERLAND	COUNTY						
	Bridgton	Upper Ridge Road	· 60	37	24	24	8.9	7.4
53	Portland	Shelter Site	61	59	51	47	21.1	18.9
ω	Portland	Tukey's Bridge	58	76	69	53	26.5	23.3
	South Portland	130 Wescott Road	58	69	50	42	19.3	16.9
	FRANKLIN CO	UNTY						
	Jay	Crash Road	119	38	33	32	15.2	13.0
	Jay	Jay Hill	117	45	37	33	14.1	11.8
	KENNEBEC CO	OUNTY						,
	Augusta	Rines Hill Parking Lot	61	52	47	46	20.2	17.0
	Winslow	Boston Avenue	179	55	50	47	18.3	16.3
	KNOX COUN	TY .						
	Thomaston	Mitchell Property	121	54	37	35	13.9	11.8
	OXFORD COL	JNTY						
	Mexico	Labonville's	173	59	59	53	18.8	16.2
	Rumford	Taylor Mountain 1	154	66	64	60	16.4	12.9
	Rumford	Village Green	177	58	58	52	15.1	12.7

TABLE 6 - 4(Continued) 1994 FINE PARTICULATE DATA SUMMARY (Micrograms Per Cubic Meter)

	SITE	ADDRESS	NUMBER OF OBSERVATIONS	HIGHEST 24-HOUR	SECOND HIGHEST	THIRD HIGHEST	ANNUAL ARITH. <u>MEAN</u>	ANNUAL GEOM. MEAN
	PENOBSCOT	COUNTY						
	Bangor	Kenduskeag Pump Station	61	77	59	49	21.9	19.3
	Brewer	Brewer Junior High School	53	70	53	42	20.1	1 <i>7.</i> 5
	Lincoln	Thomas Motel Trailer Park	77	31	28	28	14.4	13.2
	Lincoln	Lincoln Street	15	17	16	16	11.6 *	11.1 *
	Lincoln	Penobscot River	76	31	24	23	10.0	8.2
	Lincoln	Lincoln Post Office Building	162	58	49	48	23.0	21.0
	Millinocket	York Street	60	67	53	45	18.5	16.1
	Old Town	Marsh Island Apartments	54	43	42	42	18.2	16.0
	Orrington	Center Drive School	6	17	14	9	10.0 *	9.2 *
	Hampden	McGraw School	6	20	18	14	12.5 *	11.4 *
	SOMERSET CO	DUNTY	•					
54	Skowhegan	Hinckley	61	32	31	24	11.7	9.6
•-	Skowhegan	Eaton Ridge	55	31	29	29	11.9	10.0
	WASHINGTO	N COUNTY						
	Woodland	Secondary Treatment Pipeline	61	33	30	29	12.0	10.0
	Woodland	Woodland High School	180	62	52	49	16.0	13.8
	Woodland	Background	59	31	29	25	10.4	8.9
	YORK COUNT	Υ						
	Biddeford	Eagles Aerie	59	62	41	40	19.0	16.7

 $[\]mbox{\ensuremath{^{\bullet}}}$ Insufficient data collected for valid annual geometric mean.

TABLE 6 - 5
FINE PARTICULATE HISTORICAL COMPARISON
ANNUAL ARITHMETIC MEANS (ug/m3)

			ANNUA	L ARITHMETIC	MEAN(UG/M3))		
SITE	<u>ADDRESS</u>	<u> 1989</u>	<u>1990</u>	1991	1992	<u> 1993</u>	<u> 1994</u>	
ANDROSCO	GGIN COUNTY			•				
Lewiston	Country Kitchen Parking Lot	N/A	24.7	28.5	24.4	24.3	20.2	
AROOSTOOK	COUNTY				•			
Madawaska	Big Daddy's Restaurant	33.2	34.9	32.1	30.8	27.9	25.0	
Presque Isle	Northeastland Hotel	30.0	29.0	27.7	28.4 *	28.8 *	23.0	
Presque Isle	Regional Office	15.8	14.1	16.3	14.9	13.5	13.5	
CUMBERLAN	D COUNTY							
Bridgton	Upper Ridge Road	11.5	13.4	12.2	10.5	8.7	8.7	
Portland	Shelter Site	26.1	22.5	24.7	22.9	21.4	21.1	
Portland	Tukey's Bridge	N/A	N/A	27.6	24.1 *	29.0	26.5	
South Portland	130 Wescott Road	N/A	N/A	N/A	N/A	19.7	19.3	
FRANKLIN CO	OUNTY							
Jay	Crash Road	N/A	N/A	N/A	N/A	13.7 *	15.2	
Jay	Jay Hill	22.4	18.2	19.1	15.9	13.9	14.1	
KENNEBEC C	COUNTY							
Augusta	Rines Hill Parking Lot	N/A	N/A	26.3	24.9	24.8	20.2	
Winslow	Boston Avenue	N/A	27.8	21.6	20.1	20.7	18.3	
KNOX COUN	ITY							
Thomaston	Mitchell Property	18.2	15.3	15.2	14.2	14.1	14.2	
OXFORD CO	DUNTY							
Mexico	Labonville's	30.3	24.1	20.6	18 <i>.</i> 7	18.4	18.8	
Rumford	Taylor Mountain 1	N/A	N/A	17.8	14.3	15.7	16.4	
Rumford	Village Green	23.4	19.3	17.2	15.0	14.7	15.1	
PENOBSCOT	COUNTY							
Bangor	Kenduskeag Pump Station	26.2	20.5	25.1	22.2	22.2	21.9	
Brewer	Brewer Junior High School	N/A	N/A	21.4	20.6	21.1	20.1	
Lincoln	Thomas Motel Trailer Park	23.1	18.9	18.2	17.2	15.7	14.4	
Lincoln	Lincoln Street	N/A	12.7	13.1	13.9	12.5	11.6 *	

×

TABLE 6 - 5(Continued) FINE PARTICULATE HISTORICAL COMPARISON ANNUAL ARITHMETIC MEANS (ug/m3)

			ANNUA	L ARITHMETIC	MEAN(UG/M3)	
<u>SITE</u>	<u>ADDRESS</u>	<u> 1989</u>	<u>1990</u>	<u> 1991</u>	1992	<u> 1993</u>	<u>1994</u>
Lincoln	Penobscot River	N/A	11.7	11.5	11.4	10.6	10.0
Lincoln	Lincoln Post Office Building	N/A	22.5	26.8	25.8	25.9	23.0
Millinocket	York Street	18.9	16.2	15.5	16 <i>.</i> 7	19.0	18.5
Old Town	Marsh Island Apartments	N/A	N/A	21.0	20.6	22.1	18.2
Orrington	Center Drive School	13.2	11.5	12.8	10.7	11.1	10.0 *
Hampden	McGraw School	15.1	12.9	14.4	13.9	13.6	12.5 *
SOMERSET C	COUNTY						
Skowhegan	Hinckley	21.9	13.8	14.2	13.4	11.5	11.7
Skowhegan	Eaton Ridge	15.5	13.6	14.0	11.9	11.5	11.9
WASHINGTO	ON COUNTY						
Woodland	Secondary Treatment Pipeline	17.7	18.5	19.2	14.4	12.8	12.0
Woodland	Woodland High School	21.9	23.7	23.3	17,5	16.1	16.0
Woodland	Background	12.7	13.2	13.4	9.8	8.8	10.4
YORK COUN	NTY						
Biddeford	Eagles Aerie	N/A	N/A	N/A	N/A	18.3	19.0

^{*} Insufficient data collected for valid annual geometric mean.

TABLE 6-6
FINE PARTICULATE HISTORICAL COMPARISON
(Sites with samples greater than 150 ug/m3)

TOTAL NUMBER OF

		SAMPLES GREATER THAN 150 UG/M3						
SITE	<u>ADDRESS</u>	<u> 1988</u>	<u> 1989</u>	<u> 1990</u>	<u> 1991</u>	<u> 1992</u>	<u> 1993</u>	<u> 1994</u>
AROOSTOOK CO	DUNTY							
Madawaska	Big Daddy's Restaurant	1	0	0	0	0	0	0
Presque Isle	Northeastland Hotel	0	0	1	0	0	0	0

7. LEAD (Pb)

7.1 Description and Sources

Lead in the ambient air exists primarily as particulate matter in the inhalable size range. The predominant source of atmospheric lead is from motor vehicles and incineration of solid wastes. Trace amounts of lead are still present in "unleaded" gasoline and are emitted in motor vehicle exhaust. Other major sources of atmospheric lead are the extraction and processing of metallic ores.

7.2 Health and Welfare Effects

When atmospheric lead is breathed in, it is absorbed into the bloodstream and distributed throughout the body along with lead from contaminated food and drinking water. Lead accumulation in the body can impair the production of hemoglobin. Clinical lead poisoning occurs when the body's accumulation of lead becomes too high. Symptoms of lead poisoning range from loss of appetite, fatigue, cramps and constipation, and pains in the ankles and wrists to loss of power in the arms and legs, anemia, kidney disease, mental retardation, blindness and death. Lead concentrations in the ambient air are not sufficient to produce lead poisoning but they do increase the risk of harm when other sources of lead are present. And, indirectly, lead fallout from automotive exhaust onto soil and street surfaces can be ingested in considerable amounts by infants and young children.

7.3 Standards

The current National Ambient Air Quality Standard for lead is a 3-month (calendar quarter) average concentration not to exceed 1.5 micrograms of lead per cubic meter of air.

The current State Standard for lead is a 24-hour average concentration of 1.5 micrograms of lead per cubic meter of air not to be exceeded more than once per year.

7.4 Monitoring

Lead was not monitored in Maine during 1994 due to the extremely low concentrations recorded in previous years.

8. SULFATES (SO4) AND NITRATES (NO3)

8.1 Description and Sources

Sulfates and Nitrates are compounds of varying harmfulness found everywhere in the atmosphere. They are produced by nature as well as man. Man-made sulfates have their origin in sulfur dioxide while nitrates have theirs in nitrogen oxides. Fine particulate compounds, including sulfates and nitrates are formed from chemical reactions between sulfur dioxide or nitrogen dioxide emitted into the air and other substances present there. These fine particulate compounds have a long atmospheric residence time, can be transported in the air for long distances, and are capable of penetrating deeply into the human respiratory tract.

8.2 Health and Welfare Effects

Epidemiological studies of populations exposed to particulate sulfates have shown that atmospheric sulfates, more than sulfur dioxide gas or total suspended particulates, are related to aggravation of asthma, aggravation of heart and lung disease in the elderly, and impairment of lung function in school children. This evidence was obtained from EPA's Community Health and Environmental Surveillance System (CHESS). From these studies, estimates of the sulfate threshold for adverse health effects have been derived, as shown in Table 8-1. However, these epidemiological studies have not been substantiated by laboratory studies.

Both sulfates and nitrates are considered to be contributors to the acid deposition problem.

8.3 Standards

There are currently no standards for levels of sulfates in ambient air. EPA has been working on a standard and is expected to make a proposal in the future.

There are no standards for nitrates nor are there any proposed.

8.4 Monitoring

Sulfate levels were measured at three sites in Maine during 1994 by taking samples of the Hi-Vol filters from those sites and analyzing the samples for sulfates using the Automated Technicon II Methylthymol Blue Procedure. There is no standard yet and the monitoring methodology is questionable but the data is being included in this report as an aid to those interested in further information about Maine's air quality. Table 8-2 summarizes the sulfate data collected during 1994.

Nitrate levels were not measured in Maine during 1994.

TABLE 8-1 SULFATE THRESHOLDS FOR ADVERSE HEALTH EFFECTS

THRESHOLD CONCENTRATION FOR ADVERSE HEALTH EFFECT	SUSPENDED SULFATES
Aggravation of Asthma	6 to 10 Micrograms Per Cubic Meter for 24 Hours.
Aggravation of Heart and Lung	9 Micrograms Per Cubic Meter for Disease in the Elderly for 24 Hours
Subtle Decreases in Childhood	9 to 13 Micrograms Per Cubic Meter Lung Function for 1 Year.
Increase in Acute Respiratory	13 Micrograms Per Cubic Meter for Disease in Children for 1 Year.

TABLE 8-2 1994 SULFATE DATA SUMMARY (Micrograms Per Cubic Meter)

SITE	ADDRESS	NUMBER OF OBSERVATIONS	HIGHEST 24-HOUR	SECOND HIGHEST	THRD <u>HIGHEST</u>	ANNUAL <u>ARITHMETIC MEAN</u>
CUMBERLA Bridgton Portland	ND COUNTY Upper Ridge Road Shelter Site	60 61	16.6 23.5	10.6 15.3	9.5 8.8	2.9 3.9
OXFORD C Rumford	COUNTY Taylor Mountain I	21	11.8	9.9	7.5	3.8

9. ATMOSPHERIC DEPOSITION

9.1 Description and Sources

As a result of the combustion of tremendous quantities of fossil fuels such as coal and oil, the United States annually discharges approximately 50 million metric tons of sulfur and nitrogen oxides into the atmosphere. Through a series of complex chemical reactions these pollutants can be converted into acids, which may return to earth as components of either rain or snow. This atmospheric deposition, more commonly known as acid rain, may have severe ecological impacts on widespread areas of the environment.

9.2 Health and Welfare Effects

While direct health effects from acid rain have not been documented there are numerous indirect effects which could have definite effect on mankind. Atmospheric deposition is known to leach heavy metals such as mercury from rocks causing possible contamination of water supplies. Hundreds of lakes in North America and Scandanavia have become so acidic that they can no longer support fish life. The rain falling on forests and other non-farmlands could, in time, cause extensive changes in the soil chemistry. There is not enough information yet to make it possible to say exactly what the results might be, but there is no reason to think the changes will be beneficial.

9.3 Standards

There are no standards in effect or proposed for atmospheric deposition. The only permanent solution to the acid rain problem is to keep the acid levels low. The only practical way of achieving this is by reducing emissions at their sources.

9.4 Monitoring

During 1994 there were four sites collecting data on atmospheric deposition. Those four sites included a Bureau maintained site in Bridgton, a National Park Service maintained site at Acadia National Park, a University of Maine maintained site in Greenville and a National Weather Service maintained site in Caribou. The samples from these four sites are normally collected every Tuesday morning at 9:00 a.m.. Consequently, the samples are not necessarily a single storm event but are more likely to be a composite of all storm events during the previous week. The samples, if there was a significant storm, are used for field measurements of pH and conductivity and are then packaged up for shipment to the National Atmospheric Deposition Program central laboratory in Illinois. In the central laboratory they are also tested for pH and conductivity as well as additional components. Table 9-1 is a summary of the measurements taken at the central laboratory in Illinois from the DEP, NPS and University of Maine sites for the year 1994. The sulfate deposition figures were corrected for marine aerosol contribution. Table 9-2 is a historical summary of the atmospheric deposition data.

TABLE 9-1 1994 ATMOSPHERIC DEPOSITION DATA SUMMARY

SITE	ADDRESS	pH <u>MAXIMUM*</u>	pH <u>MINIMUM*</u>	pH <u>MEAN**</u>	DEPOSITION SO4***	l (Kg/ha) <u>NO3</u>
CUMBERLAND COUNTY Bridgton	Upper Ridge Road	5.55	3.91	4.61	12	11
HANCOCK COUNTY Acadia National Park	McFarland Hill Ranger Station	5.28	3.90	4.43	12	11
PISCATAQUIS COUNTY Greenville	Squaw Brook	5.28	3.99	4.48	13	11

^{*} Lab measurements.

^{**} Precipitation weighted mean.*** Corrected for marine aerosol and normalized to 52 weeks.

TABLE 9-2
HISTORICAL SUMMARY OF ATMOSPHERIC DEPOSITION DATA

SITE	ADDRESS	PARAMETER	<u>1982</u>	<u>1983</u>	<u>1984</u>	<u>1985</u>	<u>1986</u>	<u>1987</u>	<u>1988</u>	<u>1989</u>	<u>1990</u>	<u>1991</u>	<u>1992</u>	<u>1993</u>	<u>1994</u>
CUMBERLAND	COUNTY														
Bridgton	Upper Ridge	Maximum pH	7.53	6.30	4.90	5.30	5.70	6.20	5.60	6.20	5.80	5.70	6.95	6.66	5.55
J	Road	Minimum pH	3.75	3.80	3.40	3.80	3.80	3.90	3.70	4.00	3.70	3.90	3.91	3.96	3.91
•		Mean pH	4.36	4.70	4.50	4.30	4.40	4.60	4.50	4.50	4.50	4.60	4.44	4.47	4.61
		Sulfate(Kg/ha)	19.00	16.00	17.00	13.90	16.00	11.00	15.00	16.00	16.00	13.00	14.00	12.00	12.00
		Nitrate(Kg/ha)	10.60	8.00	10.40	9.70	10.00	6.00	9.00	9,00	12.00	9.00	9.00	9.00	11.00
HANCOCK C	OUNTY														
Acadia Nat'l	McFarland Hill	Maximum pH	6.14	5.90	5.40	5.60	5.30	5.50	5.80	5,50	5.20	5.50	7.50	6.19	5.28
Park	Ranger Station	Minimum pH	3,58	3.70	3.20	3.80	3.80	3.50	3.40	3.60	3.70	4.00	3.78	3.95	3.90
		Mean pH	4.44	4.70	4.60	4.50	4.50	4.60	4.50	4.50	4.50	4.60	4.47	4.59	4.43
		Sulfate(Kg/ha)	21.30	22.20	18.00	19.10	21.00	15.00	17.00	21.00	23.00	14.00	18.00	15.00	12.00
		Nitrate(Kg/ha)	11.30	10.30	11.00	11.90	12.20	8.70	9.80	12,30	15.00	10.00	12.00	11.00	11.00
PISCATAQUIS	COUNTY														
Greenville	Squaw Brook	Maximum pH						6.40	6.60	6.60	6.50	5.60	6.77	6.16	5.28
		Minimum pH						3.70	4.20	4.00	3.90	4.00	4.02	4.21	3.99
		Mean pH						4.70	4.50	4.60	4.60	4.70	4.50	4.53	4.48
		Sulfate(Kg/ha)						9.00	12.00	13.00	14.00	10.00	11.00	12.00	13.00
		Nitrate(Kg/ha)						6.00	7.00	11.00	11.00	9.00	8.00	10.00	11.00

5

10. HYDROCARBONS (HC)

10.1 Description and Sources

Hydrocarbons are a class of compounds containing carbon and hydrogen in various combinations. They are found especially in petroleum, natural gas and coal. Some are gaseous, some liquid and some are solid. There are in fact over a thousand hydrocarbon compounds. Many of the polluting hydrocarbons are discharged into the air by incomplete combustion of organic materials. A major source of this kind of hydrocarbon emission is the burning of gasoline in automobiles. Other major contributors are organic solvent evaporation, industrial processes, solid waste disposal and fuel combustion in stationary sources. The control of hydrocarbon emissions are accomplished by combustion process optimization, recovery by mass transfer principles, restriction of evaporative loss and process material and fuel substitution.

10.2 Health and Welfare Effects

Hydrocarbon air pollutants enter into and promote the formation of photochemical smog (ozone) and thus contribute to the development of eye irritation and respiratory tract problems. By themselves, hydrocarbons may induce adverse health effects, although there is relatively little quantitative data to relate individual hydrocarbons to the risk of human disease.

10.3 Standards

The present State Standard for non-methane hydrocarbons is a three hour average concentration of 160 ug/m³.

10.4 Monitoring

Hydrocarbons were not monitored as part of the State's continuous air monitoring program during 1994.

11. PRECISION AND ACCURACY

The U.S. Environmental Protection Agency regulations governing the SLAMS/NAMS network were published in 40 CFR Part 58. These regulations specify the minimum necessary requirements for the control and assessment of the quality of the ambient air monitoring data submitted to EPA. The State of Maine in its Quality Assurance Plan has required the same checks as the EPA program but has increased the number of checks required in some cases. Each organization that reports data to the State of Maine has their own reporting organization number and the precision and accuracy results are made available for each of those organizations as well as the DEP.

Precision and accuracy are two fundamental measures of the quality of data from a measurement process. Simply stated, "precision" is a measure of repeatability of the measurement process when measuring the same thing, and "accuracy" is a measure of closeness of an observed measurement value to the truth. Precision and accuracy of air monitoring or measurement data cannot be ascertained from the data themselves, but require the use of specially planned checks from which precision and accuracy can be estimated. The results are used to assess the quality of the monitoring data being reported to EPA by an agency.

The U.S. EPA has established guidelines for evaluating the upper and lower 95% probability limits. The quarterly probability limits for precision data should fall within a range of -15% to +15% and the quarterly probability limits for accuracy data should fall within a range of -20% to +20% ($\pm 15\%$ for TSP and PM10). These ranges are only guidelines, but when they are exceeded, procedures should be reviewed to determine the reason for the wide variation in the data.

11.1 Precision

For automated methods, this requirement is met by challenging the analyzer to a one point precision check gas of known concentration. The concentration of the precision check gas and the concentration indicated by the analyzer are used to assess the precision of the monitoring data. Data from all the monitors operated for a particular pollutant by a reporting organization are then combined to give overall precision data for that pollutant and that reporting organization. Precision checks for manual methods are obtained by operating co-located samplers at selected sites (specific requirements must be met for these sites). For each pair of co-located samplers, one is designated as the sampler which will be used to report air quality for the site and the other is designated as the duplicate sampler. The differences in the measured concentration (ug/m³) between the two co-located samplers are used to calculate and assess the precision of the monitoring data.

11.2 Accuracy

To measure the closeness of an observed measurement value to the truth, some material or condition of known (true) property must be measured by the measurement system being checked. The measurement system is "challenged" with the "known" to obtain the observed measurement. For automated analyzers, "known" gaseous pollutant concentrations determined using different standards and different equipment from those used for routine calibration and spanning are

introduced into the measurement instruments. In this way, two different calibration systems are involved: the one used for routine monitoring and the one used to assess the "known." For manual methods, it is difficult to challenge the total measurement system with "knowns." Therefore, an accuracy audit is made of only a portion of the measurement system. The two major portions of manual measurement systems are the flow and the analytical measurements. The flow measurement portion of the particulate methods are audited for accuracy. Blind samples are provided by EPA for analysis to determine the bad accuracy results.

The precision and accuracy results are reported in Tables 11-1 and 11-2. When reviewing this data, it is important to note that not all precision data collected is used in the analysis. The particulate precision data, especially PM10 data, because of the low concentrations recorded at most sites, is most affected by this. Typically only a small percent of the valid pairs are utilized in the analysis and because of that the probability limits can be much larger than might be expected. Additional review of the data will document those cases.

In a number of instances accuracy probability limits are not calculated even though audits were conducted. Apparently, the program used to calculate accuracy does not calculate it when there is only one monitor or one site in operation. Hopefully, the program will be revised in the future to account for all the data.

TABLE 11-1 1994 PRECISION DATA SUMMARY

PARAMETER	SUMMARY PERIOD	NUMBER OF SITES	PRECISION CHECKS	PROBABIL LOWER 95%	ITY LIMITS UPPER 95%
Sites operated by Ma	aine DEP				
Sulfur Dioxide	Q1 Q2 Q3 Q4 Year	3 2 3 4 5	24 24 26 51 125	-5 -3 -4 -5 -5	6 6 3 4 5
Ozone	Q1 Q2 Q3 Q4 Year	3 11 11 4 12	10 112 111 31 264	-5 -5 -3 -11 -6	4 8 4 10 7
Fine Particulate*	Q1 Q2 Q3 Q4 Year	4 4 4 4	52 52 56 48 208	-12 -18 -8 -11 -13	3 9 8 9 8
Sites operated by Pe	enobscot Energ	y Recovery C	ompany, Orrin	gton	
Fine Particulate*	Q1 Year	1 1	6 6	**	**
Sites operated by S.	D. Warren Cor	npany, Skowh	negan	-	
Ozone	Q1 Q2 Q3 Q4 Year	0 1 1 1	0 13 14 4 31	-5 -7 0 -6	-1 1 2 1
Fine Particulate*	Q1 Q2 Q3 Q4 Year	1 1 1 1	9 15 14 14 52	** -18 ** -13	** ** 17 ** 17
Sites operated by In	ternational Pa	per Company,	Jay		
Sulfur Dioxide	Q1 Q2 Q3 Q4 Year	1 1 1 1	6 21 16 14 57	-6 -3 -6 1 -5	0 10 8 4 8

TABLE 11-1(Continued) 1994 PRECISION DATA SUMMARY

PARAMETER	SUMMARY PERIOD	NUMBER OF SITES	PRECISION CHECKS	PROBABIL LOWER 95%	ITY LIMITS UPPER 95%
Fine Particulate*	Q1	1	13	0	8
	Q2	1	14	**	**
	Q3	1	14	-1	9
	Q4	1	14	-2	4
	Year	1	55	-2	7
Sites operated by Bo	oise Cascade P	aper Group, F	Rumford		
Sulfur Dioxide	Q1	4	44	-6	7
* * * *	Q2	4	52	-7	8
	Q3	4	50	-4	7
	Q4	4	52	-5	10
	Year	4	198	-6	9
Fine Particulate*	Q1	1	15	-5	3
	Q2	1	13	**	**
•	Q3	1	15	-6	6
	Q4	1	13	-8	7
	Year	1	56	-6	6 .
Sites operated by Dr	agon Products	s, Thomaston			
Total Suspended	Q1	1	14	-13	14
Particulates*	Q2	1	15	-4	9
	Q3	1	16	-3	10
	Q4	1	15	-1	10
	Year	1	60	-4	10
Fine Particulate*	Q1	1	15	**	**
	Q2	1	15	**	**
	Q3	1	16	-5 -	5
	Q4	1	15	-5	16
	Year	1	61	-5	8
Sites operated by So	ott Paper Com	pany, Winslo	w		
Total Suspended	Q1	1	19	-4	9
Particulate*	Q2	1 .	16	-21	15
· · ·	Q3	1	15	-6	6
	Q4	1	15	-4	4
	Year	1	65	-10	10

TABLE 11-1(Continued) 1994 PRECISION DATA SUMMARY

PARAMETER	SUMMARY <u>PERIOD</u>	NUMBER OF SITES	PRECISION CHECKS	PROBABIL LOWER 95%	ITY LIMITS UPPER 95%
Fine Particulate	Q1	1	16	0	7
	Q2	1	15	1	12
	Q3	1	15	-13	8
	Q4	1	15	-10	5
	Year	1	61	-9	9
Sites operated by L	incoln Pulp & P	aper Compan	y, Lincoln		
Sulfur Dioxide	Q1	1	5	-3	6
	Year	1	5	-3	6
Total Suspended	Q1	1	5	-11	14
Particulate*	Year	1	5	-11	14
Fine Particulate*	Q1	1	14	-4	12
	Q2	1	15	**	**
	Q3	1	16	-5	2
	Q4	1	15	-7	10
	Year	1	60	-5	9
Sites operated by G	reat Northern P	aper Compan	y, Millinocket		
Sulfur Dioxide	Q1	1	7	-4	4
	Q2	1	6	-8	3
	Q3	1	7	-5	1
	Q4	1	6	-9	8
	Year	1	26	-7	4
Fine Particulate*	Q1	1	15	-17	10
	Q2	1	15	**	**
	Q3	1	16	**	**
	Q4	1	14	-13	3
	Year	1	60	-15	8
Sites operated by G	eorgia Pacific (Company, Wo	odland		
Fine Particulate*	Q1	1	14	-4	6
	Q2	1	15	**	**
	Q3	1	16	-1 -	6
	Q4	1	15	-6	6
	Year	1	60	-3	6

TABLE 11-1(Continued) 1994 PRECISION DATA SUMMARY

PARAMETER	SUMMARY <u>PERIOD</u>	NUMBER OF SITES	PRECISION CHECKS	PROBABIL LOWER 95%	ITY LIMITS UPPER 95%
Sites operated by F	raser Paper Co	mpany, Madav	waska		
Sulfur Dioxide	Q1	3	39	0 -	4
•	Q2 Q3	3 3	39 40	-1 -3	2 1
	Q4 Year	3 3	39 157	-2 -3	2 3

^{*} The total number of precision checks collected is listed for this parameter but not all of the pairs are used in the calculation of probability limits.

^{**} Insufficient data was available to calculate the probability limits.

TABLE 11-2 1994 ACCURACY DATA SUMMARY

				PR	OBABILIT	Y LIMITS		
	SUMMARY	NO. OF	LEV	EL 1	LEV	EL 2	LEV	EL 3
<u>PARAMETER</u>	PERIOD	<u>AUDITS</u>	<u>-95%</u>	<u>95%</u>	<u>-95%</u>	<u>95%</u>	<u>-95%</u>	<u>95%</u>
Sites operated by Ma	aine DEP							
Sulfur Dioxide	Q1	. 0						
	Q2	2						
	Q3	0						
	Q4	2	-6	3	-8	4	-5	0
	Year	4	-4	-1	-6	0	-4	-3
Ozone	Q1	0						
	Q2	8	-10	4	-7	4	-5	3
	Q3	0						
	Q4	6	-11	6	-6	3	-5	4
	Year	14	-8	2	-5	2	-5	3
Fine Particulate	Q1	20			-5	10		
,	Q2	21			-7	· 7		
	Q3	12			-5	4		
	Q4	23			-6	8		
	Year	76			-5	7		
Sites operated by S.	D. Warren Co	mpany, Sko	whegan					
Ozone	Q1	0						
	Q2	1	*	*	*	*	*	*
	Q3	1	*	*	*	*	*	*
	Q4	0						
	Year	2	*	*	*	*	*	*
Fine Particulate	Q1	3			2	3		
i iiio i aitioalato	Q2	3			2	3		
	Q3	3			7	7		
	Q4	3			1	1		
	Year	12			3	3		
Sites operated by In	ternational Pa	per Compar	ıy, Jay					
Sulfur Dioxide	Q1	0				•		
-and bioxide	Q2	2	*	*	*	*		
	Q3	0						
	Q4	2	*	*	*	*		
	Year	4	*	*	*	*		

TABLE 11-2(Continued) 1994 ACCURACY DATA SUMMARY

				PR	OBABILIT	Y LIMITS		
	SUMMARY	NO. OF	LEV	EL 1	LEVI	EL 2	LEV	EL 3
<u>PARAMETER</u>	<u>PERIOD</u>	<u>AUDITS</u>	<u>-95%</u>	<u>95%</u>	<u>-95%</u>	<u>95%</u>	<u>-95%</u>	<u>95%</u>
Fine Particulate	Q1	3			-4	- 5		
i ilie Faitioulate	Q1 Q2	3			. 1	1		
	Q2 Q3	3			-1	2		
	Q4	3			- 2	-1		
	Year	12			ō	1		
Sites operated by Bo	oise Cascade F	Paper Group	, Rumford	d				•
Sulfur Dioxide	Q1	4	-10	6	-12	3	-15	7
Gailla, Dioxido	Q2	4	-13	7	-15	6	-11	2
	Q3	4	-9	19	-11	20	-11	20
	Q4	4	-4	19	-7	13	-8	11
	Year	16	-6	10	-9	8	-8	7
							-	
Fine Particulate	Q1	5			-2	7		
	Q2	5			1	5		
	Q3	5			2	7		
	Q4	5			-3	9		
	Year	20			0	7		
Sites operated by Di	agon Product	s, Thomasto	on			-		
Total Suspended	Q1	0						
Particulates	Q2	6		•	*	*		
Particulates	Q2 Q3	0						
	Q3 Q4	6			*	*		
	Year	12			*	*		
	1001	'-						
Fine Particulate	∞ Q1	0						
	Q2	6			*	*		
	Q3	0						
	Q4	6			*	*		
	Year	12			*	*		
Sites operated by So	ott Paper Con	npany, Wins	low					
Total Suspended	Q1	3			-7	-5		
Particulate	Q2	3			1	5		
	Q3	3			-2	2		
	Q4	3			-2	3		
	Year	12		•	-1	0		

TABLE 11-2(Continued) 1994 ACCURACY DATA SUMMARY

				PR	OBABILIT	Y LIMITS		
	SUMMARY	NO. OF	LEV	EL 1	LEV	EL 2	LEV	EL 3
<u>PARAMETER</u>	PERIOD	<u>AUDITS</u>	<u>-95%</u>	<u>95%</u>	<u>-95%</u>	<u>95%</u>	<u>-95%</u>	<u>95%</u>
Fine Particulate	Q1	0						
	Q2	4			*	*		
	Q3	0						
	Q4	4			*	*		
	Year	8			*	*		
Sites operated by Li	incoln Pulp & F	Paper Comp	any, Linc	oln				
						-		
Fine Particulate	Q1	4			-3	8		
	Q2	4			-10	3		
	Q3	4			-5	6		
	Q4	3			-10	5		
	Year					0		
	Year	15			-2	U		
Sites operated by G	reat Northern F	Paper Comp	any, Milliı	nocket				
Sulfur Dioxide	Q1	0						
Canal Bloxide	Q2	2	*	*	*	*	*	*
			*	*	*	*	*	
	Q3	1	-					-
	Q4	2	-	*	*	*	*	*
	Year	5	*	*	*	*	*	*
Fine Destinutate	04	^						
Fine Particulate	Q1	0						
	Q2	4			*	*		
	Q3	0						
	Q4	4			*	*		
	Year	8			*	*		
Sites operated by G	eorgia Pacific	Company, V	Voodland			•		
		_				_		
Fine Particulate	Q1	5			-4	2		
	Q2	5			-8	1		
	Q3	5			1	7		
	Q4	5			-2	2		
	Year	20			-2	1		
Sites operated by F	raser Paper Co	mpany, Mac	lawaska					
Sulfur Dioxide	Q1	3	-6	12	-1	8	-1	7
	Q2	3	-1	3	-1	3	-3	7
	Q3	3	- 4	1	-2	2	Ö	5
			- -5	11	- <u>-</u> 2 -5	8	-9	10
	Q4	3						
	Year	12	0	2	0	3	-3	7
* Insufficient data w	as available to (calculate the	probability	/ IIMITS.				

12. AIR TOXICS

12.1 Compound-specific Background

Chlorine/Chloroform:

Chlorine is principally used by the chemical manufacturers' industry to produce chemicals (principally chlorinated organics), by the pulp and paper industry for bleaching pulp to produce white paper, in water and waste treatment processes for disinfection, and in cooling towers to curb biofouling in heat transfer systems (1) (2). It is known that the presence of chlorine and hydrocarbons in water can form such chlorinated compounds as chloroform, dioxin, chlorinated phenols, and other chlorinated hydrocarbons. Since there are no major organic chemical production facilities in Maine, the primary sources of chloroform in Maine are water and wastewater treatment facilities, cooling towers, and the pulp and paper industry.

Theoretically, we expect to see levels of chloroform that are higher than normal around pulp mills. The Toxic Release Inventory developed by the U.S. Environmental Protection Agency (EPA) requires that certain manufacturing facilities submit chemical emissions data. These data indicate that pulp mills are one of the major industrial sources of chloroform in Maine.

Other sources of chloroform are waste water treatment facilities. DEP's Volatile Organic Compound (VOC) emissions inventory for the towns in the 1992 air toxics monitoring study indicate VOCs from these facilities (chloroform is one of many VOCs) are substantially less than pulp mill chloroform emissions alone. For example, based on EPA emission factors, the DEP has estimated that Westbrook's wastewater treatment works had VOC releases in 1990 of 5.5 tons; the S.D. Warren facility in Westbrook had chloroform releases of approximately 27 tons in 1990. Similarly, in Woodland, the emissions of VOCs from the sewage treatment facility were less than 1 ton, whereas Georgia Pacific emitted 177 tons of chloroform. According to the Agency for Toxic Substances and Disease Registry (ATSDR) Draft Toxicological Profile for chloroform (3), most of the chloroform in the environment originates from industrial processes.

Cooling tower emissions of chloroform in Maine, primarily associated with electric generators, is currently unknown.

Due to chloroform's volatility, it eventually is released to the air, where it breaks down slowly (in approximately 5 - 6 months). Since chloroform is persistent in the atmosphere, it can be transported for long distances depending on the meteorological conditions. Those areas with no major known sources of chloroform, but where chloroform is found, may be experiencing this phenomenon.

DHS guideline is: 210 micrograms per cubic meter averaged over 24 hours

0.43 micrograms per cubic meter averaged over 1 year

(1 in 100,000 excess cancer risk)

0.043 micrograms per cubic meter averaged over 1 year

(1 in 1,000,000 excess cancer risk)

Tetrachloroethylene:

The majority of tetrachloroethylene (PCE) releases are from the dry cleaning industry (4). Other emissions to the air are from processes that use PCE as a solvent, such as in metal degreasing operations. This use of PCE is being phased out as less toxic metal degreasing solvents enter the market. In general, PCE levels in the air are higher in urban/suburban areas than in more remote areas. PCE persists several months in the atmosphere.

DEP standard is: 0.01 micrograms per cubic meter average over 1 year

(1 in 1,000,000 excess cancer risk).

Benzene:

Nationally, petroleum refining operations and petrochemical manufacturing sites are the main sources of benzene in the environment (5). Emissions from burning coal and oil, benzene waste and storage operations, motor vehicle exhaust, evaporation from gasoline service stations, and use of industrial solvents also contribute to benzene levels in air. According to the Toxic Release Inventory - 1990 database, there are no major industrial users or sources of benzene at or above the TRI reporting thresholds in Maine. This suggests that in Maine, the primary sources of benzene are most likely combustion of fossil fuel, and evaporation from gasoline service stations. Once released to the atmosphere, benzene breaks down (photooxidizes) within a few days.

DHS guideline is: 450 micrograms per cubic meter averaged over 24 hours

0.12 micrograms per cubic meter averaged over 1 year

(1 in 100,000 excess cancer risk)

0.012 micrograms per cubic meter averaged over 1 year

(1 in 1,000,000 excess cancer risk)

Toluene:

Toluene is a solvent, and is also a component of gasoline. Nationally, marketing and combustion of gasoline represent the major sources of toluene emissions (6). Toluene releases will end up in the atmosphere, due to its volatility, where it will photooxidize within a few hours to a few days (6). In 1985, the DEP estimated that approximately 855 tons of toluene were emitted from the marketing of gasoline and its combustion. According to the 1990 TRI database only 234 tons of toluene were released from stationary sources. Toluene is used by some of the sources potentially impacting the monitors.

DEP standard is: 15,000 micrograms per cubic meter (instantaneous)

260 micrograms per cubic meter averaged over 24 hours 180 micrograms per cubic meter averaged over 1 year

Xylenes:

Solvents and thinners for paints and varnishes often contain xylenes. Xylenes are used as a solvent in the printing, rubber, and leather industries, and also as cleaning agents. They are also found in gasoline. Xylenes photooxidize in the atmosphere fairly rapidly, within 1 - 2 days. A total of 169 tons of xylenes were released to the air in 1990, based on TRI data. (7).

DHS guideline is: 65,000 micrograms per cubic meter (instantaneous)

300 micrograms per cubic meter averaged over 24 hours 300 micrograms per cubic meter averaged over 1 year

1,3-butadiene:

1,3-butadiene is associated with fossil fuel combustion. It is primarily released to the atmosphere during manufacture, use, transport, and storage of gasoline, but other sources exist, such as wood smoke (8). 1,3-butadiene breaks down rapidly in air, especially in the presence of sunlight. The total expected life of 1,3-butadiene is short; approximately 0.48 hrs (10) to 2 hours (8).

DHS guideline is: 370 micrograms per cubic meter averaged over 24 hours

0.036 micrograms per cubic meter averaged over 1 year

(1 in 100,000 excess cancer risk)

0.0036 micrograms per cubic meter averaged over 1 year

(1 in 1,000,000 excess cancer risk)

Carbon tetrachloride:

Carbon tetrachloride (CCl4) has been widely used as a refrigerant and aerosol propellant, although its use for these purposes is being phased out due to its effect on the stratospheric ozone layer. CCl4 was once used as a cleaning fluid, but this use was stopped in the mid-1960's. However, it is a very stable and persistent compound in the environment; it takes 30-100 years for half of the carbon tetrachloride that is released to be broken down into other components in the air (9).

DHS guideline is: 860 micrograms per cubic meter averaged over 24 hours

0.7 micrograms per cubic meter averaged over 1 year

(1 in 100,000 excess cancer risk)

0.07 micrograms per cubic meter averaged over 1 year

(1 in 1,000,000 excess cancer risk)

12.2 Monitoring

Air toxics monitoring was conducted in the Fall of 1991 at two sites in the Rumford/Mexico area, as a pilot study. The Department of Environmental Protection (DEP) then conducted an expanded monitoring effort in 1992 for four towns (10 sites) in southern Maine, two towns (five

sites) Downeast, and one town (5 sites) in central Maine. The samples were collected for a 24-hour period, and analyzed for a suite of compounds commonly examined in laboratories doing air toxics work. The Department of Human Services (DHS) evaluated the data for potential health risks.

Very little is known about air toxics in Maine and the concentrations to which people are being exposed; an enhanced inventory is necessary to define all sources of hazardous air pollutants. DEP believes that the 1992 monitoring program was a start in understanding ambient air quality in Maine regarding toxics; in particular, in understanding the relationship between emissions and exposure.

During 1993 a limited number of canister samples were collected in the Rumford/Mexico area to provide additional information and to verify some of the previous data collected in that area. The canisters were analyzed late in 1994 and preliminary findings appear to confirm earlier sampling results. That data is now being evaluated by the Bureau of Health and a report will be issued at a later date.

References

- Chlorine and Hydrogen Chloride
 Environmental Health Criteria 21
 IPCS International Programme on Chemical Safety
 World Health Organization, Geneva, 1982
- Locating and Estimating Air Emissions from Sources of Chloroform
 Office of Air Quality Planning and Standards
 US Environmental Protection Agency
 March 1984
- 3. Toxicological Profile for Chloroform

 Dept. of Health and Human Services, Public Health Service

 Agency for Toxic Substances and Disease Registry (ATSDR)

 Draft document, February 18, 1992
- Toxicological Profile for Tetrachloroethylene
 Dept. of Health and Human Services
 Public Health Service
 Agency for Toxic Substances and Disease Registry (ATSDR)
 Draft document, February 18, 1992
- Toxicological Profile for Benzene
 Dept. of Health and Human Services
 Public Health Service
 Agency for Toxic Substances and Disease Registry (ATSDR)
 Draft document, February 18, 1992
- 6. Risk Assessment Document for Toluene Dept. of Human Services Bureau of Health Final report, March, 1987
- 7. Toxicological Profile for Total Xylenes
 Dept. of Health and Human Services
 Public Health Service
 Agency for Toxic Substances and Disease Registry (ATSDR)
 December, 1990
- 8. Toxicological Profile for 1,3-Butadiene
 Dept. of Health and Human Services
 Public Health Service
 Agency for Toxic Substances and Disease Registry (ATSDR)
 Draft document, February 15, 1991

- 9. Toxicological Profile for Carbon Tetrachloride
 Dept. of Health and Human Services
 Public Health Service
 Agency for Toxic Substances and Disease Registry (ATSDR)
 December, 1989
- 10. Handbook of Environmental Organic Chemicals Karel Verschueren 1983

13. HYDROCARBONS AS PRECURSORS TO GROUND LEVEL OZONE FORMATION

13.1 History and Establishment of Site

EPA, with the enactment of the Clean Air Act Amendments of 1990, specified the analysis of volatile organic compounds (VOC), which were determined to be ozone precursors, in areas where the National ozone standard (.12 ppm) was not being met. The state of Maine exceeds this standard on various days throughout the summer months. In addition, Maine's own Ozone standard (.081 ppm) is exceeded on a regular basis during the hot weather. A Photochemical Assessment Monitoring Site (PAMS) was established at Two Lights State Park in Cape Elizabeth in the spring of 1994 to determine which hydrocarbons and in what amount were present throughout the summer months when ground level ozone events are most likely to occur. This site has an ozone (O₃) monitor, a low-level nitrogen oxides (NO-NO₂-NO_x) monitor, a meteorological system and a gas chromatograph which has a sample preparation specific for the most volatile hydrocarbons (VOC's). A majority of these hydrocarbons are associated with gasoline, before and after combustion.

13.2 Monitoring

The hydrocarbons on the list of Target VOC Ozone Precursors (Table 13.1) are the compounds which are of interest to EPA and the DEP regarding ground level ozone formation. These compounds contain two to ten carbon atoms and are the most volatile of hydrocarbons. At the Two Lights State Park site, a 32 minute intergrated ambient air sample was taken and analyzed each hour, 24 hours a day between July first and September twenty-second. There was some down time, but analysis for these compounds did occur during most ground level ozone exceedances throughout the season of 1993.

13.3 Chemistry

The two chromatograms which follow (Figure 13.1) are the actual 54 calibration compounds which were analyzed at the Two Lights State Park site in 1993. Each large peak using the corresponding AIRS CODE is a compound on the Target VOC Ozone Precursor List (except for TNMOC which is the total of all of the compounds analyzed). These compounds are analyzed based on their number of carbons, their molecular weight and their volatility. The higher the volatility, the faster the compound comes through the column of the gas chromatograph.

13.4 Relationship with Ozone (O₃) and Nitrogen Oxides (NO_x)

The two charts which follow show the relationship between three important parameters during an ozone event, ground level ozone (O_3) , and its two precursors: nitrogen oxides (NO_x) , and total non-methane organic compounds (TNMOC). The first chart (Figure 13.2) represents a summer day with northwesterly winds when the ozone was low. The maximum hourly value was .037ppm. The second chart (figure 13.3) illustrates a day when the ozone reached an hourly value

of .122ppm. This is over the Maine health standard of .081ppm and is considered to be in the unhealthful catagory. The wind was predominantly southwest throughout the day. This chart illustrates just one example of how these parameters are related during a ground level ozone event. Each event seems to have its own "personality", depending on when, where, and how it was formed. The continuous analysis of the photoreactive volatile organic compounds help us to understand the formation of ground level ozone. VOC's are an integral piece of the ground level ozone puzzle.


TABLE 13 - 1 TARGET VOC OZONE PRECURSORS - HYDROCARBONS

AIRS	COMPOUND NAME	AIRS	
CODE	COMPOUND NAME	CODE	COMPOUND NAME
43206	ACETYLENE	43203	ETHYLENE
43202	ETHANE	43205	PROPYLENE
43204	PROPANE	43280	1-BUTENE
43214	ISOBUTANE	43216	trans-2-BUTENE
43212	n-BUTANE	43282	3-METHYL-1-BUTENE
43217	cis-2-BUTENE	43224	1-PENTENE
43221	ISOPENTANE	43220	n-PENTANE
43243	ISOPRENE	43226	trans-2-PENTENE
43227	cis-2-PENTENE	43228	2-METHYL-2-BUTENE
43244	2,2-DIMETHYLBUTANE	43283	CYCLOPENTENE
43234	4-METHYL-1-PENTENE	43242	CYCLOPENTANE
43284	2,3-DIMETHYLBUTANE	43285	2-METHYLPENTANE
43230	3-METHYLPENTANE	43246	2-METHYL-1-PENTENE
43231	n-HEXANE	43289	trans-2-HEXENE
43290	cis-2-HEXENE	43262	METHYLCYCLOPENTANE
43247	2,4-DIMETHYLPENTANE	45201	BENZENE
43248	CYCLOHEXANE	43263	2-METHYLHEXANE
43291	2,3-DIMETHYLPENTANE	43249	3-METHYLHEXANE
43250	2,2,4-TRIMETHYLPENTANE	43232	n-HEPTANE
43261	METHYLCYCLOHEXANE	43252	2,3,4-TRIMETHYLPENTANE
45202	TOLUENE	43960	2-METHYLHEPTANE
43253	3-METHYLHEPTANE	43233	n-OCTANE
45203	ETHYLBENZENE	45109	meta/para-XYLENE
45220	STYRENE	45204	o-XYLENE
43235	n-NONANE	45210	ISOPROPYLBENZENE
45209	n-PROPYLBENZENE	45207	1,3,5-TRIMETHYLBENZENE
45208	1,2,4-TRIMETHYLBENZENE		
43102	TOTAL NON-METHANE		
	ORGANIC COMPOUNDS		
	(TNMOC)		

FIGURE 13-1 CHROMATOGRAM OF CALIBRATION COMPOUNDS

Chromatogram

Chromatogram

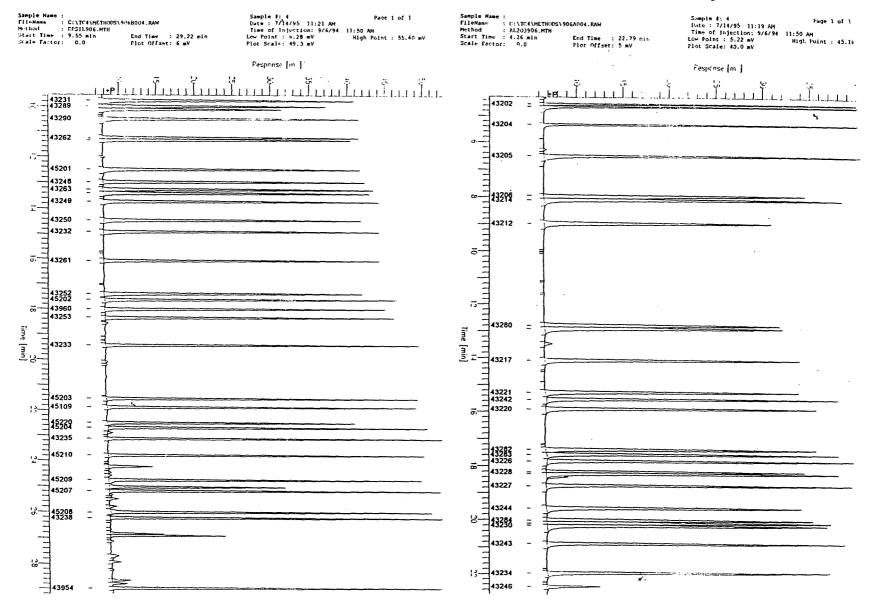


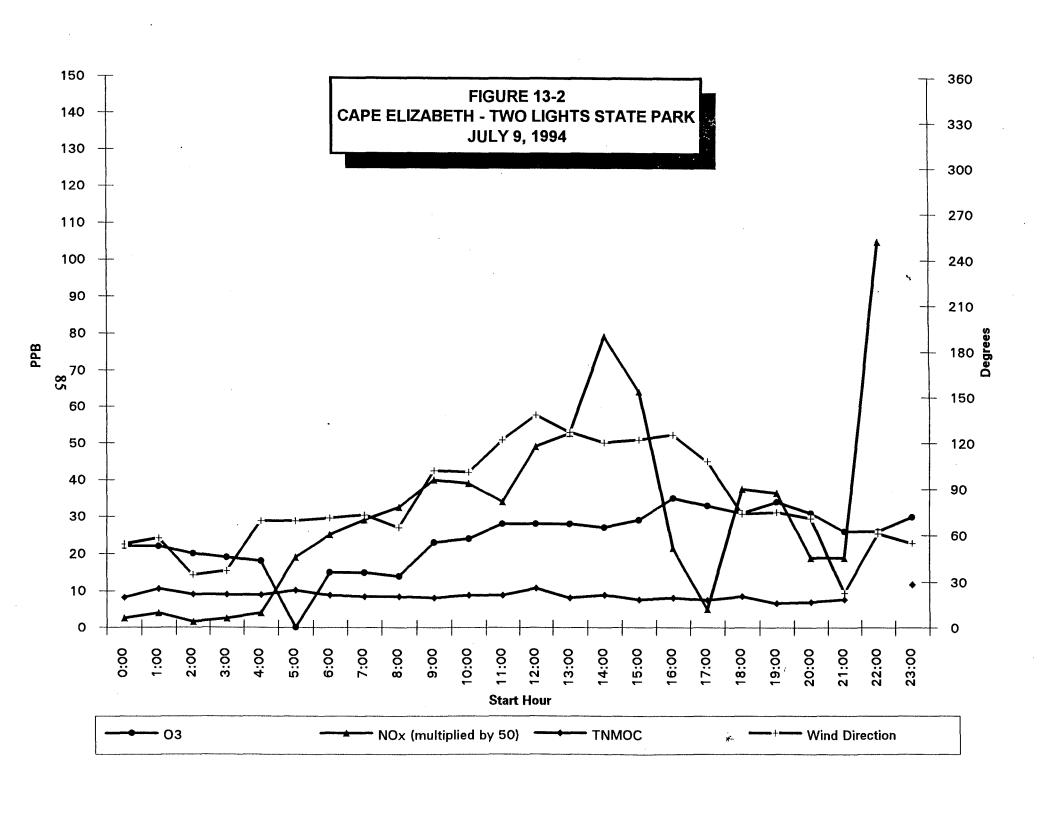


FIGURE 13-3 CAPE ELIZABETH - TWO LIGHTS STATE PARK JULY 21, 1994

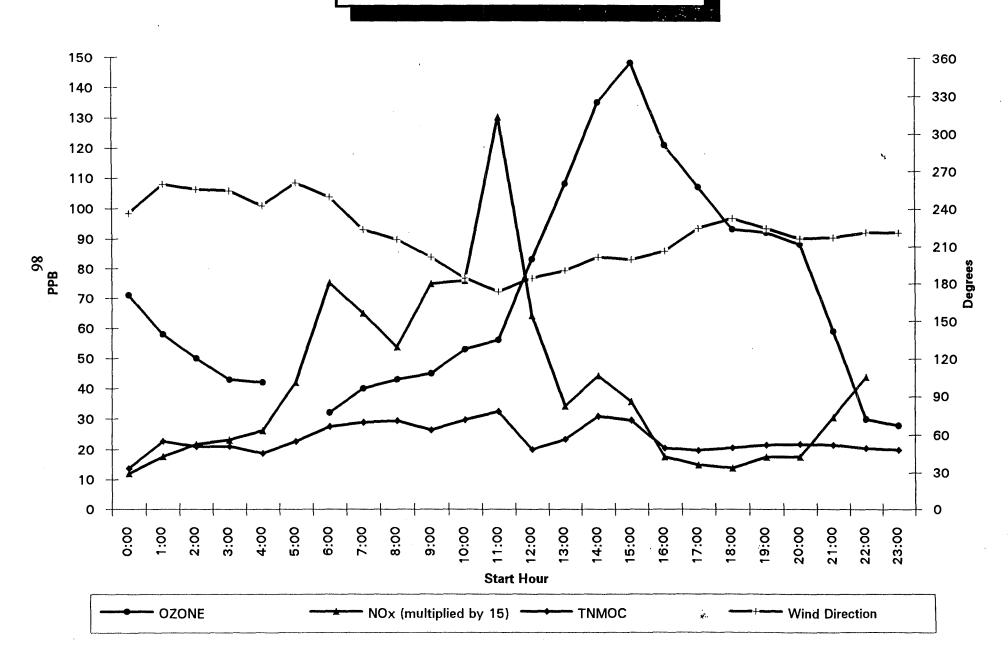

14. ULTRAVIOLET-B(UV-b)

14.1 Description and Sources

Ultraviolet-b is part of the radiation reaching the earth's surface from the sun. Solar UV radiation is divided into three regions; UV-a(400-315 nanometers(nm)), UV-b(315-280nm) and UV-c(280nm to x-ray region). Because of the absorption by the upper atmosphere no light with a wavelength shorter than 280nm reaches the earth's surface. The majority of the UV-b is also absorbed by the ozone layer and the atmosphere. The amount of UV-b that actually reaches the earth's surface is further affected by ground level ozone, particulates and other pollutants, clouds and the elevation of the surface. In addition, the effects of the UV-b reaching the earth's surface are magnified by a reflective ground cover such as snow or water.

14.2 Health and Welfare Effects

Light in the UV-b wavelength region has been shown to be responsible for many biologically harmful effects in both plants and animals. In plants overexposure to UV-b is known to cause DNA damage and decreased agriculture yields. In animals overexposure to UV-b is known to cause skin cancer, eye damage, suppression of the immune response system, sunburns and premature wrinkling of the skin.

14.3 Standards

There are currently no standards for UV-b. Data from UV-b monitoring is reported as MED(Minimum Erythemal Dose) units. MED is a measurement based on the dose of effective radiation received and its ability to cause damage, such as sunburn, to the human skin. MED units are based on the time it took to cause erythemia(reddening) of the skin of the average caucasian using differing wavelengths of UV-b. Data is reported as the number of MED's received that hour. For example, if for a particular hour 4 MED's were reported then that means a person would have received four times the amount of sunlight it takes to cause sunburn in the average caucasian. Various agencies around the world have developed indices for rating the amount of exposure to UV-b that individuals receive. For example less than 2 MED's/hour might be considered low whereas 6 or more MED's/hour might be considered very high exposure.

14.4 Monitoring

During 1993 a monitoring site in Howland was equipped with a UV-b monitor and a total solar monitor. This site was chosen because of its rural location, stable land use, freedom from obstructions and the availability of other data from instruments already installed at the site. Some problems were experienced during this first year of operation, most notably frost forming on the dome of the total solar monitor. The lack of a Quality Assurance plan has also caused minor problems. Quality assurance checks currently performed are based on our present knowledge of this methodology. Table 13-1 is a summary of the top twenty hourly values collected during 1994 for each of the parameters indicated. A more detailed description of the 1994 UV-b monitoring

program is available from the Bureau of Air Quality Control.

TABLE 14-1
HIGHEST VALUES FOR TOTAL SOLAR, UV-B AND MED UNITS
1994

TOTAL SOLAR			ULTRAVIOLET-B			MED UNITS		
		TOTAL			AVG.			
		SOLAR			UV-b			
	•	watts/meter-			280-			MED
DATE	TIME	2	DATE	TIME	315NM	DATE	TIME	UNITS
05/29/94	13:00	992.5122	06/18/94	12:00	1.77	06/18/94	12:00	4.65
06/10/94	12:00	962.7378	06/18/94	13:00	1.75	06/18/94	13:00	4.50
06/23/94	12:00	958.3857	07/14/94	12:00	1.69	07/14/94	12:00	4.44
07/04/94	12:00	955.3740	06/16/94	12:00	1.69	06/16/94	12:00	4.43
07/03/94	12:00	953.8213	07/12/94	12:00	1.67	07/12/94	12:00	4.40
06/05/94	12:00	952.1777	06/16/94	13:00	1.67	06/16/94	13:00	4.30
06/09/94	13:00	947.3599	07/14/94	13:00	1.66	06/17/94	12:00	4.28
05/03/94	12:00	945.6401	06/17/94	12:00	1.63	07/04/94	12:00	4.27
06/11/94	12:00	945.1582	07/04/94	12:00	1.63	06/18/94	11:00	4.27
05/20/94	12:00	945.0630	06/18/94	11:00	1.63	07/14/94	13:00	4.27
05/11/94	12:00	944.6733	06/29/94	12:00	1.62	06/29/94	12:00	4.24
07/14/94	12:00	943.7842	07/29/94	12:00	1.60	07/29/94	12:00	4.21
06/23/94	13:00	939.4614	07/15/94	12:00	1.60	07/15/94	12:00	4.20
07/14/94	13:00	936.6973	07/03/94	12:00	1.59	07/03/94	12:00	4.18
06/11/94	13:00	934.4531	07/13/94	12:00	1.59	07/13/94	12:00	4.18
07/12/94	12:00	933.8320	07/12/94	13:00	1.58	07/14/94	11:00	4.11
05/29/94	12:00	932.7788	07/04/94	13:00	1.57	07/12/94	11:00	4.07
06/09/94	12:00	930.6797	06/17/94	13:00	1.57	07/12/94	13:00	4.06
07/04/94	11:00	926.6147	07/14/94	11:00	1.56	07/02/94	12:00	4.06
08/06/94	12:00	925.4355	08/06/94	12:00	1.56	07/04/94	13:00	4.05
07/04/94	13:00	923.4053	07/12/94	11:00	1.55	06/17/94	13:00	4.04
07/03/94	11:00	923.3730	07/02/94	12:00	1.54	06/16/94	11:00	4.04
06/11/94	11:00	922.9131	06/16/94	11:00	1.54	06/29/94	11:00	4.03
06/09/94	11:00	922.0371	06/29/94	11:00	1.54	08/06/94	12:00	4.01
05/11/94	11:00	921.4775	06/11/94	12:00	1.52	06/11/94	12:00	4.00

89

15. ERRATA SHEETS

During reviews of previous Annual Reports on Air Quality, a number of errors were discovered As a result some of the statistics reported were incorrect. For the benefit of the reader, all of the known corrections are presented below.

1993 Annual Report on Air Quality

- Page 3 Table 1-3. Federal days of ozone violation in Region 110 should be 2 instead of 4. Totals column should be 2 also.
- Page 18 Table 1-6. Madawaska site number should be 23 003 1003.
- Page 19 Table 1-6. TSP sites in Franklin county were all discontinued in 1994.
- Page 30 Table 3-1. Last two columns are Number of Exceedances rather than Violations. Table should indicate 1 federal exceedance at Port Clyde.
- Page 31 Table 3-2. Isle Au Haut site for 1988 should indicate 241 hours of violation. This table was redone in the 1994 Report to indicate number of state exceedances. A complete review of the data was done and other minor discrepancies in the number of hours of exceedance were discovered. Please refer to Table 3-2 in the 1994 Report for the corrected numbers.
- Page 32 Table 3-3. Kennebunkport site 50th percentile for 1983 should be .046 ppm.

1992 Annual Report on Air Quality

- Page 3 Table 1-3. Federal ozone violations for Region 110 should be 3. Totals column should also be 3.
- Page 18 Table 1-6. Madawaska site number should be 23 003 1003.
- Page 30 Table 3-1. Federal ozone violations for the Cape Elizabeth site should be 1.
- Page 31 Table 3-2. Number of violations at the Dedham and Isle Au Haut sites for 1988 were switched. Dedham should be 111 and Isle Au Haut should be 241.
- Page 45 Table 6-3. Number of exceedances at the Burnham site in Jay for 1992 should be 1.

1991 Annual Report on Air Quality

- Page 33 Table 3-2. Number of violations at the Dedham and Isle Au Haut sites for 1988 were switched. Dedham should be 111 and Isle Au Haut should be 241.
- Page 63 Table 9-1. Title should read "1991 Atmospheric Deposition Data Summary."

1990 Annual Report on Air Quality

Page 22 Table 1-4. References to year should all be 1990.

1989 Annual Report on Air Quality

- Page 2 Table 1-1. Hydrocarbons should not be listed on this table.
- Page 49 Table 6-4. Data for Bangor-Kenduskeag Pump Station should read 61, 59, 54, 53, 26.2 and 23.5.
- Page 51 Table 6-5. Annual arithmetic mean for 1989 at the Bangor-Kenduskeag Pump Station site should be 26.2.
- Page 64 Sec. 10.3 Standards "and Federal" should be eliminated.

1988 Annual Report on Air Quality

- Page 2 Table 1-1. Hydrocarbon should not be listed on this table.
- Page 10 Figure 1-3. Two sites used the same symbol. The Madawaska site is the higher of the two.
- Page 51 Table 6-5. Gulley Hill Road site: 1988 AAM should be 24.9 and the Northeastland Hotel site 1988 AAM should be 26.4.
- Page 59 TAble 8-2. Madawaska-St. Jarres data should be 57, 9.3, 9.2, 9.0, 4.4.
- Page 63 Sec. 10.3 Standards "and Federal" should be eliminated.

1987 Annual Report on Air Quality

- Page 2 Table 1-1. Hydrocarbon should not be listed on this table.
- Page 55 Sec. 10.3 Standards "and Federal" should be elimated.

1986 Annual Report on Air Quality

- Page 2 Table 1-1. Hydrocarbon should not be listed on this table.
- Page 53 Sec. 10.3 Standards "and Federal" should be elimated.

1985 Annual Report on Air Quality

- Page 2 Table 1-1. Hydrocarbon should not be listed on this table.
- Page 53 Sec. 10.3 Standards "and Federal" should be elimated.

1984 Annual Report on Air Quality

Page 2 Table 1-1. Hydrocarbon should not be listed on this table.

- Page 18 Table 2-1. Concentrations are in mg/m³.

 Bangor data should read 58, 4.4, 3.2, 1.9, 0.9, 0.6

 Portland data should read 5543, 12.2, 11.4, 7.9, 7.9, 3.8
- Page 22 Table 3-2. Cape Elizabeth second high for 1984 should be .146 ppm. Acadia second high for 1984 should be .130 ppm.
- Page 27 Table 5-1. Dexter Avenue-Thomaston number of observations should be 7877. Greenfield Drive-Kittery number of observations should be 5221. Masonic Temple-Kittery number of observations should be 7723.
- Page 33 Table 6-1. Reilly Property-South Paris should read 12, 160, 152, 120, 93.4. Hinckley-Skowhegan should read 118, 68, 64, 61, 20.8.
- Page 40 Table 7-1. Presque Isle-Northeastland Hotel had 48 observations and Creasey Ridge Road had 41.
- Page 46 Sec. 10.3 Standards "and Federal" should be elimated.

1983 Annual Report on Air Quality

- Page 2 Table 1-1. Hydrocarbon should not be listed on this table.
- Page 48 Sec. 10.3 Standards "and Federal" should be elimated.

1982 Annual Report on Air Quality

- Page 2 Table 1-1. Hydrocarbon should not be listed on this table.
- Page 48 Sec. 10.3 Standards "and Federal" should be elimated.

1981 Annual Report on Air Ouality

Page 44 Sec. 10.3 Standards "and Federal" should be elimated.

1980 Annual Report on Air Quality

- Page 27 Table 5-1. East Millinocket-Katahdin School % Data Recovery should be 96.8%.
- Page 29 Table 5-2. Millinocket-York Street maximum 24-hr for 1980 should be .195.
- Page 32 Table 6-1. Augusta-Cony High School Annual Geometric Mean should be 62.1.